


Give All Information Completely
Make Required Affidavit
Mail or Deliver Form to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

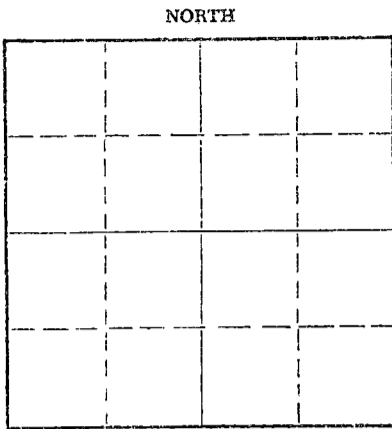

Locate well correctly on above Section Plat

PAWNEE County, Sec. 8 Twp. 23S Rge. (E) 17 (W)
Location as "NE/CNW%SW%" or footage from lines. NW NW NW
Lease Owner A. L. ABERCROMBIE, INC.
Lease Name CLARK Well No. 3
Office Address 801 UNION CENTER - WICHITA, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed June 17 19 54
Application for plugging filed April 15 19 69
Application for plugging approved APRIL 18 19 69
Plugging commenced MAY 13 19 69
Plugging completed June 21 19 69
Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production May 12 19 69
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well DON TRUAN
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4310' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 232' | None |
| | | | | 5 1/2" | 4308' | 3313.68' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4310' - 4270' - PLUG
4270' - 4150' - SAND
4150' - 4110' - 5 SACKS CEMENT
4110' - 300' - PUMPED 20 SACKS GEL MUD AND 5 SACKS HULLS.
300' - BASE - PUMPED 100 SACKS CEMENT

RECEIVED
STATE CORPORATION COMMISSION
JUL 8 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.
Address BOX 562 - GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
T. L. NUTT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *T. L. Nutt*
BOX 562 - GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of June, 19 69

My commission expires July 31, 1970
Mary M. Guesnier
Mary M. Guesnier Notary Public.

15-145-60832-0000

COPY


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- WELCH & OLSSON
Farm- Clark No. 3

SEC. 8 T. 23 R. 17W
NW NW NW

Total Depth. 4310'
Comm. 6-9-54 Comp. 7-21-54
Shot or Treated.
Contractor.
Issued. 4-22-61

County Pawnee
KANSAS



5" CASING:
4308'

Elevation. 2065'

Production: 300 BO-NW

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE

TOPS: SCOUT
Lansing 3732
Viola 4279

Total Depth 4310'

RECEIVED
STATE CORPORATION COMMISSION
MAY 13 1970
CONSERVATION DIVISION
Wichita, Kansas