

15-145-01183-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

PAWNEE County. Sec. 6 Twp. 23 Rge. 17W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner SANTA FE PIPE & SUPPLY, INC.

Lease Name SHOWALTER # 1 Well No. 1

Office Address P. O. BOX 562 - GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed AUGUST 22 19 54

Application for plugging filed MAY 23 19 64

Application for plugging approved MAY 25 19 64


Plugging commenced MAY 23 19 64

Plugging completed MAX JUNE 1 19 64

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

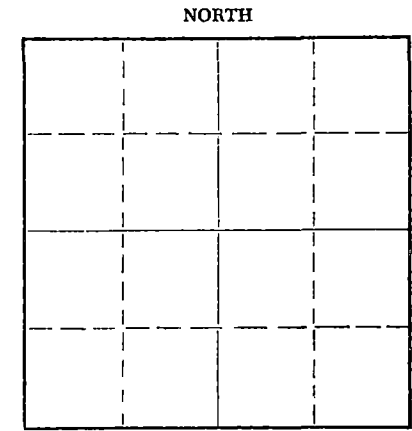

Name of Conservation Agent who supervised plugging of this well MR. ELDON PETTY

Producing formation Depth to top Bottom Total Depth of Well 4320' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	232'	NONE
				5 1/2"	4320'	3579'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGED BACK WITH SAND FROM 4200' TO 4170'
4170' TO 4138' - 4 SACKS OF CEMENT
EX 4138' - 300' - 40 SACKS OF GEL MUD
300' TO BASE OF CELLAR - 100 SACKS OF CEMENT

RECEIVED
STATE CORPORATION COMMISSION

8-20-64 AUG 20 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor ACE PIPE PULLING COMPANY

Address P. O. BOX 304 - GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

T. L. NUTT (employee of owner) OK (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]

P. O. BOX 562 - GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 13TH day of AUGUST, 19 64

My commission expires JULY 31, 1964

Mary M. Guesnier Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

5-149-0183-0000


COPY

Company- WELCH & OLSSON DRILLING CO., INC.
Farm- Showalter No. 1

SEC. 6 T. 23 R. 17W
SE SE SE

Total Depth. 4320'
Comm. 8-9-54 Comp. 8-22-54
Shot or Treated.
Contractor. Welch & Olsson Drlg. Co., Inc.
Issued. 2-26-55

County Pawnee
KANSAS



CASING:
8 5/8" 232' w/175 sx cem.

Elevation. 2068 3B

Production. Oil Producer.
13 BO

Figures indicate Bottom of Formations.

shale w/sand strks	230
shale	335
red bed	575
sand	670
red bed w/shale strks	980
red bed -shale	1107
anhydrite	1127
shale-shells	1975
shale w/lime strks	2095
shale-lime	2220
lime-shale	2500
shale w/lime strks	2595
shale-lime	2725
lime-shale	2800
shale-shells	3275
shale-lime	3450
lime	3500
lime-shale	3627
shale	3632
lime	4198
Conglomerate	4201
lime	4320
Total Depth	

TOPS:	
Heebner	3627
Brown lime	3732
Lansing-Kansas City	3740
Conglomerate-shaley	4162
Conglomerate-cherty	4184
Mississippian	4201
Misener sand	4245
Viola	4279

RECEIVED
STATE CORPORATION COMMISSION

AUG 20 1964

CONSERVATION DIVISION
Wichita, Kansas