

15-145-01187-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pawnee County, Sec. 6 Twp. 23 Rge. 17 (E) W (W)

Location as "NE/CNW&SW" or footage from lines. C SE NE
Lease Owner A. L. Abercrombie, Inc.
Lease Name Porteous Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12-24-63 _____ 19____
Plugging completed 1-4-64 _____ 19____
Reason for abandonment of well or producing formation Depleted.

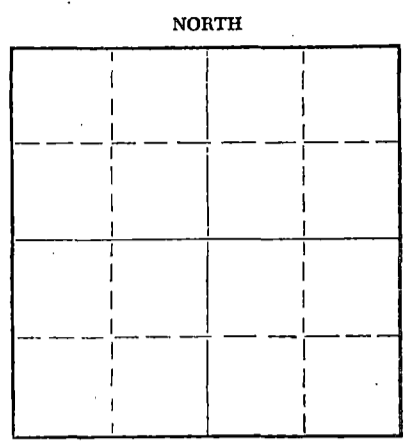

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4290 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	204'	None
				5-1/2"	4289'	2651'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to plug back @ 4278', sanded to 4100' and dumped 5 sacks of cement @ 4100' with dump bailer. Pulled 5 1/2" casing and pumped in 20 sacks of gel mud. Pumped 100 sacks of cement to surface pipe and left closed in.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

JAN 13 1964 1-13-64

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of January, 1964

My commission expires May 20, 1964
Milton J. Volin Notary Public.

15-145-01182-0000

WELL LOG.

WELCH & OLSSON DRILLING COMPANY, INC.

Elevation: 2066 R.B.

CONTRACTOR: Welch & Olsson Drilling Co. Inc.

Commenced Drlg: 6-20-55

WELL #1

Compl Drlg: 7-2-55

Approx. SE SE NE 6-23-17W.

Pawnee County, Kansas.

Production: Oil well

Casing Record:

Set 204' of 8 5/8" with 175 sacks of cement.

(Figures indicate bottom of formations.)

<u>FORMATIONS:</u>	<u>DEPTHS</u>	<u>FORMATION TOPS.</u>	
Sand, Red Bed & Shale:	204	Anhydrite (Driller)	1140 (-1926)
Shale:	380	Heebner:	3625 (-1559)
Red Bed:	570	Brown Lime:	3725 (-1659)
Sand:	670	Lansing-Kansas City:	3733 (-1667)
Red Bed & Shale:	900	Conglomerate-Shaley:	4156 (-2090)
Shale & Red Bed:	1140	Conglomerate-Cherty:	4180 (-2114)
Anhydrite:	1160	Sand-Misener:	4219 (-2153)
Shale & Shells:	1950	Viola:	4270 (-2204)
Shale & Lime:	2825		
Shale & Shells:	3025		
Shale & Lime:	3260		
Lime & Shale:	3725		
Lime:	4140		
Lime & Shale:	4156		
Conglomerate:	4180		
Chert:	4195		
Sand:	4235		
Lime:	4290 T.D.		

RECEIVED
STATE CORPORATION COMMISSION

DEC 4 1963

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS,)
) SS:
SEDGWICK COUNTY,)

I hereby certify that the above is a true and correct copy of Drillers Log of well drilled in the approximate center of the SE SE NE of Section 6, Township 23, Range 17 West, Pawnee County, Kansas.

WELCH & OLSSON DRILLING COMPANY, INC.

BY [Signature]
R. E. WELCH

Subscribed and sworn to before me this 11th day of July, 1955.

[Signature]
Edith Erker, Notary Public.

My commission expires:
June 12, 1959.