

Give All Information Completely
Make Required Affidavits
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee

County. Sec. 6 Twp. 23 Rge. 17 (~~27~~) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE

Lease Owner Welch & Olsson Drilling Company, Inc.

Lease Name Porteous Well No. B-1

Office Address 203 Rule Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 2-27 19 56

Application for plugging filed 2-28 19 56

Application for plugging approved 2-28 19 56


Plugging commenced 2-28 19 56

Plugging completed 2-28 19 56

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well R. M. Brundage, Box 283, Hoisington, Ks.

Producing formation Depth to top Bottom Total Depth of Well 44-15 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped hole full of heavy rotary mud. Set plug. Cemented
and displaced with Service Truck 100 sacks of cement.

Name of Plugging Contractor Welch & Olsson Drilling Company, Inc.
Address 203 Rule Bldg. Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
R.E. Welch (employee or owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) [Signature]

203 Rule Bldg. Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of March, 19 56

My commission expires June 12, 1959

[Signature]
Notary Public.

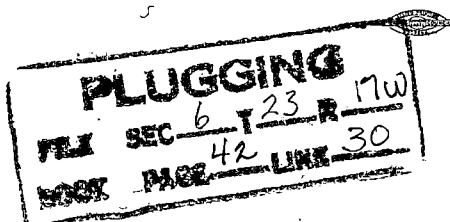

2-7-56

15-145-00983-0000

WELL LOG.

WELCH & OLSSON DRILLING COMPANY, INC.
CONTRACTOR: WELCH & OLSSON DRILLING CO. INC.
PORTEOUS B-1
SW SW NE of Sec. 6-23-17, Pawnee County, Kansas.

Elevation: 2072 R.B.
Comm. Drlg: 2-14-56
Compl. Drlg: 2-27-56
Production: D & A

Casing Record.

Set 200' of 8 5/8" with 175 sacks of cement.

(Figures indicated bottom of formations.)

<u>FORMATIONS</u>	<u>DEPTHS</u>	<u>FORMATION TOPS.</u>	
Clay & Shale:	197	Heebner:	3660 (-1588)
Shale:	325	Brown Lime:	3763 (-1691)
Red Bed & Shale:	575	Lansing-Kansas City:	3774 (-1702)
Sand:	655	Conglomerate-Shaley:	4199 (-2127)
Shale:	1127	Conglomerate-Cherty:	4247 (-2175)
Shale & Shells:	1970	Sand-Misener:	4294 (-2222)
Shale & Lime:	2085	Viola:	4363 (-2291)
Shale & Shells:	2250		
Shale & Lime:	2970		
Shale & Lime Strks:	3175		
Shale & Lime:	3230		
Lime & Shale:	3325		
Lime:	3595		
Shale & Lime:	3675		
Lime & Shale:	3805		
Lime:	4241		
Shaley Conglomerate:	4244		
Conglomerate:	4290		
Sand:	4330		
Sand & Lime:	4385		
Lime:	4415 T.D.		

STATE OF KANSAS,)
) SS:
SEDGWICK COUNTY,)

I hereby certify that the above is a true and correct copy of Drillers Log of well drilled in the SW SW NE of Section 6, Township 23, Range 17 W, Pawnee County, Kansas.

WELCH & OLSSON DRILLING COMPANY, INC.
BY *R. E. Welch*
R. E. WELCH

Subscribed and sworn to before me this 6th day of March, 1956.
Leech Shaw
Notary Public.

My commission expires:
June 12, 1959

PLUGGING
PEX SEC 6 T 23 R 17W
DOCK PAGE 42 LINE 30

RECEIVED
STATE OF KANSAS
MAY 1956
CONSERVATION DEPARTMENT
Wichita, Kansas