


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Barton County, Sec. 26 Twp. 20 Rge. 14 (~~EX~~) (W)

Location as "NE/CNW/SW" or footage from lines NE SE NW

Lease Owner Rocket Drilling Company, Inc.

Lease Name Janne Well No. 1

Office Address 352 North Broadway, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed August 6, 1954 1954

Application for plugging filed December 11, 1958 1958

Application for plugging approved December 12, 1958 1958

Plugging commenced December 13, 1958 1958

Plugging completed December 16, 1958 1958

Reason for abandonment of well or producing formation well no longer commercially productive

If a producing well is abandoned, date of last production November 19 58

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation Arbuckle Depth to top _____ Bottom _____ Total Depth of Well 3603 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	477'	0'
				5 1/2	3602'	2988.58

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand to 3540 - 5 sacks cement; surface casing flowing water. Pumped 20 sacks jell mud, plug and 100 sacks cement filling surface from 300' to base of cellar with cement.

RECEIVED
STATE CORPORATION COMMISSION
FEB 18 1959
CONSERVATION DIVISION
WICHITA, KANSAS
2-18-1959

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rocket Drilling Company
Address 352 North Broadway, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. H. Myrick (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) LH Myrick

352 North Broadway, Wichita, Kansas
(Address)


SUBSCRIBED AND SWORN TO before me this 17th day of February, 19 59

My commission expires 8-7-1961

Zella Ford
Notary Public.

PLUGGING
FILE SEC. 26 T. 20 R. 14W
BOOK PAGE 3 LINE 32

15.009.07459.0000

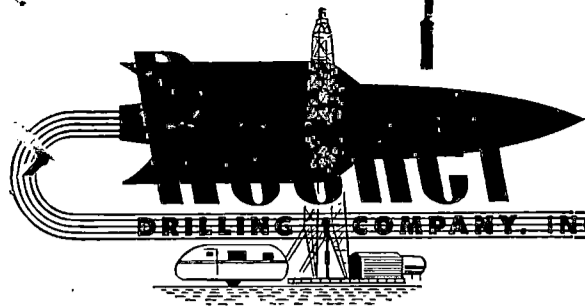

DRILLING COMPANY, INC. - (Ores) 3-1279 - 352 N. BROADWAY - WICHITA, KANSAS

#1 Janne
NE SE NW, 26-20-14W
Barton County, Kansas

Elevation: 1906 R.B.
Spudded: 7-25-54
Rotary Completed: 8-6-54
Initial Production: 3 BOPH / 8 BWPH
Contractor: Rocket Drilling Company, Inc.

CASING RECORD

477' 8-5/8" O.D. 24# Seamless Casing cemented with 250 sacks cement.
3602' 5-1/2" O.D. 14# Seamless Casing cemented with 100 sacks cement.

DRILLERS LOG

Sand	0 to 215	Shale	1795
Shale & Shells	310	Shale & Lime	2100
Sand	420	Broken Lime	2215
Red Bed	815	Lime & Shale	3035
Anhydrite	840	Lime	3120
Sand	860	Lime & Shale	3275
Shale & Shells	1290	Lime	3363
Salt & Shale	1450	Lime & Shale	3395
Shale	1495	Lime	3479
Sand & Shale	1730	Lime & Shale	3545
		Lime	3603 TD

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I hereby certify that to the best of my knowledge and belief, the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

By _____
B. W. Burks

Subscribed and sworn to before me, a Notary Public, in and for the State and County aforesaid, this 20th day of August, 1954.

My commission expires: March 5, 1958

Notary Public

PLUGGING			
FILE	SEC. 26	T. 20	R. 14W
BOOK	PAGE 3	LINE 32	

RECEIVED
STATE CORPORATION COMMISSION
DEC 12 1958
CONSERVATION DIVISION
Wichita, Kansas