



LAUCK & MONRIEF

No.1 Sievorling

Sec. 17-19-10W NWC SW SE

Commenced Sept. 11, 1944

Completed Oct. 11, 1944


Casing 10" 816' cemented 100 sacks  
 5" 3330 " 50 "

Sand	100
sand & lime	125
shale	218
red rock	550
shale & red rock	830
red rock	930
salt	1200
shale & lime	1520
shale & shells	1670
sand	1700
lime	1745
shale & shells	1830
shale & lime	2130
shale & shells	2210
shale & lime	2310
shale & shells	2510
shale & lime	2730
lime	2885
shale & lime	3095
lime	3313
Conglomerate	3333
lime	3349
cored 3337-3342	4' recovery
cored 3342-3349	2 1/2' recovery
Standardized	

Topo Derrick floor

Brown lime	2992
white lime	3024
cherty conglom.	3310-corrected
reworked Arbuckle	3324
solid	3330
total depth	3362

Rotary T.D. Derrick floor 3343 -3346  
 drill plug show free oil  
 Lime hard 3346-3348  
 lime medium 3350  
 slight saturation  
 1 1/2 bbls oil per hour  
 500' acid no help  
 Lime hard 3356  
 lime hard 3359  
 trace water  
 lime 3362  
 T.D. Dry

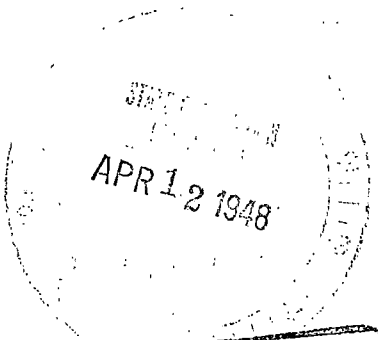

**PLUGGING**  
 FILE SEC. 17-19-R(10W)  
 ROCK PAGE 137 LINE 1