

15-145-61187-0000 2R

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

PAWNEE County, Sec. 16 Twp. 23S Rge. 17W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW SW

Lease Owner SANTA-FE PIPE & SUPPLY, INC.

Lease Name FERGUS "B" Well No. 3

Office Address BOX 562, GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed 19

Application for plugging filed JULY 18 1967

Application for plugging approved JULY 20 1967


Plugging commenced JULY 21 1967

Plugging completed SEPTEMBER 27 1967

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

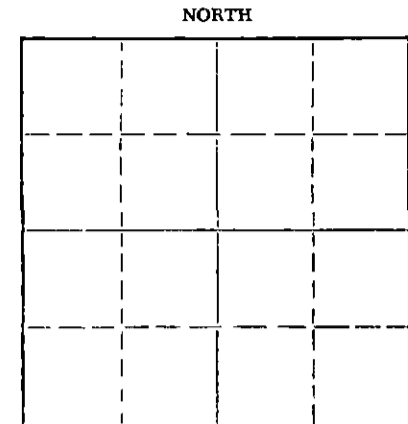

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well MR. LEO MASSEY

Producing formation Depth to top Bottom Total Depth of Well 4375 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	214	NONE
				5 1/2	4373	3393

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4375 - 4330 - PLUG
 4330 - 4310 - SAND
 4310 - 4270 - 5 SACKS CEMENT
 4270 - 240 - PUMPED 20 SACKS JEL MUD
 240 - BASE - PUMPED 80 SACKS CEMENT

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 12 1967
 10-12-1967
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC
Address BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
T.L. NUTT

(employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T.L. Nutt
BOX 562, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 11TH day of OCTOBER, 19 67

My commission expires JULY 31, 1970

Mary M. Guernsey
Notary Public.

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas

COPY


15-149-01187-0000

Company: HILTON DRILG. CO.
 Farm: Fergus "B" No. 3

SEC. 16 T. 23 R. 17W
 SE NW SW

Total Depth. 4375'
 Corrn. 6-23-56 Comp. 7-8-56
 Shot or Treated.
 Contractor.
 Issued. 10-26-57

County Pawnee
 KANSAS



Elevation. 2110

Production. 58 BOPD

CASING:

8" 214'
 5" 4473'

Figures indicate Bottom of Formations.

sand	95
clay-shale	214
shale	280
sand-shale	680
red rock	1140
anhydrite	1160
shale	1170
shale-shells	1975
shale-lime	2230
lime	2585
shale-lime	3300
lime	3360
shale-lime	3445
lime	3620
shale-lime	3877
lime	4127
shale-lime	4189
lime	4257
chert-shale	4308
chert-lime	4375
Total Depth	

TOPS: Scout	
Heebner	3680
Brown lime	3787
lime	3796
shaly conglomerate	4222
chat conglomerate	4240
Mississippi	4288
Viola	4352

RECEIVED
 STATE CORPORATION COMMISSION

JUL 20 1967

CONSERVATION DIVISION
 Wichita, Kansas