

15-145-00300-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County. Sec. 16 Twp. 23 Rge. 17 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NW SE

Lease Owner Shallow Water Refining Company

Lease Name Fergus C#1 Well No. _____

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced 2/27/67 _____ 19__

Plugging completed 3/ 2/67 _____ 19__

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

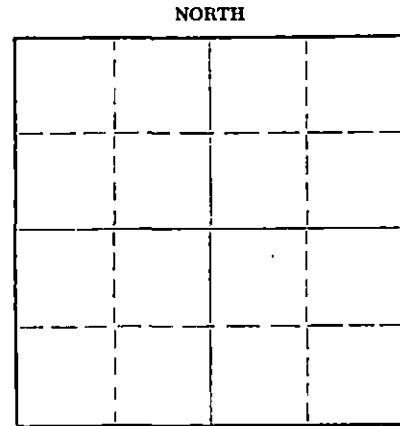

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4331 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	DATE	SIZE	PUT IN	PULLED OUT
			8 5/8	229	none
		MAR 10 1967	5 1/2	4354	2723.48
		3-10-1967			
	CONSERVATION DIVISION Wichita, Kansas				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Raised mast, checked bottom. Ran sand to 4200', dumped 5 sacks of cement. Cleaned cellar, rigged up on 5 1/2", had trouble with National Braden head. Had 21" tension. Loaded hole, shot pipe at 3106', 3016', 2925', 2815', 2715'. Worked pipe loose and pulled 30 joints. Pulled 53 joints of 5 1/2", pipe was breaking hard. Cleared floor, loaded junk rack, tried to clean out cellar. Kept caing in. Cleaned cellar, had welder cut off braden head, weld on 8 5/8 slip collar. Hook up pump, pumped 25 sacks of gel mud and 80 sacks of cement. Rack pump and unit. Loaded unit.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight

CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of March, 19 70

My commission expires October 22, 1970

Notary Public.

15-145-00300-0000
E.L.
S.H.B.

D R I L L E R ' S _ L O G

COMPANY: WESTPAN HYDROCARBON COMPANY LOCATION: NW of NW of SE
CONTRACTOR: HILTON DRILLING COMPANY, INC. Sec. 16-23S-17W
FARM NAME: FERGUS "C" #1 Pawnee County, Kansas
ELEVATION: 2106 K.B.
COMMENCED: April 15, 1955 Casing Used: 8-5/8" @ 229' w/200 sacks
COMPLETED: April 28, 1955 5-1/2" @ 4354' w/150 sacks

Clay	40
Sand and Shale	120
Sand, Shells and Shale	230
Shale	340
Shale and Red Bed	605
Sand	675
Red Bed	1130
Anhydrite	1160
Shells and Shale	1600
Shale and Lime	2075
Lime	2520
Shale and Lime	3329
Lime	3700
Shale and Lime	3784
Lime	4177
Shale and Lime	4248
Shale and Chert	4282
Lime and Chert	4356
Total Depth	4356

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1967
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS }
COUNTY OF BARTON } SS.

I, the undersigned, being duly sworn on oath, state that the above statement and log are true and a correct record and log of the well drilled at the location above described.

HILTON DRILLING COMPANY, INC.

Henry Peacock
Henry Peacock, Secretary

Subscribed and sworn to before me this 28th day of April, 1955:

My commission expires January 26, 1959

Carmen G. Liker
Notary Public