


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

Barton County, Sec. 24 Twp. 20 Rge. 12 (W)

Location as "NE/CNW/SW" or footage from lines NE NW SW
Lease Owner Cooperative Refinery Association
Lease Name Buckbee "A" Well No. 1
Office Address Box 765, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed August 23 19 44
Application for plugging filed September 17 19 56
Application for plugging approved September 19 19 56
Plugging commenced September 26 19 56
Plugging completed October 3 19 56
Reason for abandonment of well or producing formation Non-commercial production

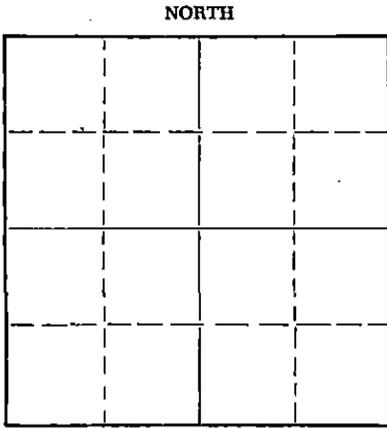

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production September 22 19 56
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundage
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3367 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 1/4"	250'	-0-
				5 1/2"	3345	2477.31'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole from T.D. 3367 to 3330, dumped 5 sacks cement, top of cement 3290. Pulled casing. Mudded hole to 235', set 10 ft. rock bridge, top of bridge 225', dumped 20 sacks cement. Top of cement 155'. Mudded to 40'. Set 5 ft. rock bridge. Dumped 10 sax. cement for top and cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Chas. Wilson, Inc.
Address Gt. Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson
Box 765 Gt. Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 4 day of October 19 56

My commission expires September 2, 1959

Ruth V. Love Notary Public.

PLUGGING
FILE SEC 24 T. 20 R. 12W
BOOK PAGE 102 LINE 15

RECEIVED
STATE CORPORATION COMMISSION
OCT 5 X 1956
CONSERVATION DIVISION
Wichita, Kansas

10-5-1956