


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

WELL PLUGGING RECORD

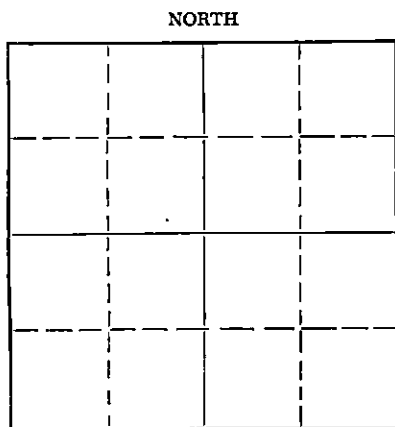

Locate well correctly on above Section Plat

Barton County. Sec. 24 Twp. 20S Rge. (E) 12 (W)  
Location as "NE/CNW&SW" or footage from lines C E/2 NE SW  
Lease Owner Cooperative Refinery Association  
Lease Name Buckbee "A" Well No. 8  
Office Address Box 765 Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed February 7 19 49  
Application for plugging filed November 28 19 55  
Application for plugging approved November 29 19 55  
Plugging commenced September 28 19 56  
Plugging completed September 25 19 56  
Reason for abandonment of well or producing formation non commercial production

If a producing well is abandoned, date of last production March 3 19 55  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundege  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3358 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3338	1443'
				8 5/8"	274'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded back to 3170'. Dumped 5 sacks cement, top of cement 3130'. Pulled casing, mided hole to 235'. Set 10 foot rock bridge, top of bridge 225'. Dumped 20 sacks cement, top of cement 165'. Mided hole to 35 feet. Set 5 ft. rock bridge. Dumped 10 sacks cement for top and cap.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Charles Wilson, Inc.  
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson  
Box 765 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 26 day of September 19 56

My commission expires September 2, 1959

Ruth V. Love  
RECEIVED  
STATE CORPORATION COMMISSION  
SEP 27 1956  
CONSERVATION DIVISION  
Wichita, Kansas  
9-27-1956

PLUGGING  
FILE SEC 24 T. 20 R. 12W  
BOOK PAGE 20 LINE 3