

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barton County, Sec. 23 Twp. 20S Rge. 12W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
SW NW NW


Lease Owner Murfin Drilling Company
Lease Name Johnson "A" Well No. 3 SWD
Office Address 250 N. Water, Suite 300: Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Oil

Date Well completed 10-21 1955
Application for plugging filed 1-16 1984
Application for plugging approved verbal 19
Plugging commenced 4-06 1984
Plugging completed 4-06 1984
Reason for abandonment of well or producing formation

closer disposal facilities
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck
Producing formation Arbuckle Depth to top 3361' Bottom TD Total Depth of Well 3480'
Show depth and thickness of all water, oil and gas formations.

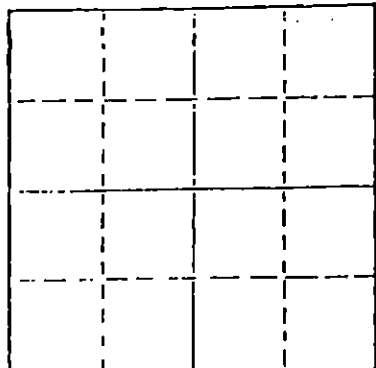

Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	190'	
				5 1/2"	3396'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Pumped 510 sx. 50/50 Pozmix w/6% gel, 3% calcium chloride and 4 sx. flocele down the
5 1/2" casing. Volume of 5 1/2" casing was calculated to be 310 sx. Shut in 5 1/2" at 150#.
Pumped 100 sx. 50/50 Pozmix w/8% gel and 3% calcium chloride down the 8 5/8" casing,
filled to surface. Shut in 8 5/8" casing at 50#.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Murfin Drilling Company

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
P.T. Canaday, Jr. Engineer (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) By: [Signature]
250 N. Water, Suite 300; Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 25 day of April, 19 84

My commission expires 2/6/86

[Signature]
Kerran Redington Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
APR 26 1984
CONSERVATION DIVISION
Wichita, Kansas

4-26-1984