


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

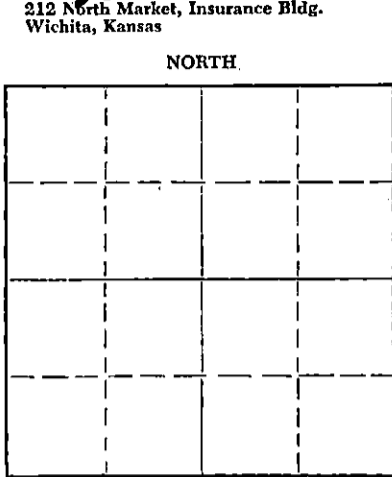

Locate well correctly on above Section Plat

Barton County. Sec. 22 Twp. 20S Rge. 12W (E) (W)
Location as "NE/CNW%SW%" or footage from lines SE NW SE
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name Louise Rolfs Well No. 2
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed November 20, 1958 19
Application for plugging filed July 21, 1959 19
Application for plugging approved July 23, 1959 19
Plugging commenced July 23, 1959 19
Plugging completed July 28, 1959 19
Reason for abandonment of well or producing formation non-productive in commercial quantities
If a producing well is abandoned, date of last production July 18, 1959 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Arbuckle Depth to top 3389 Bottom _____ Total Depth of Well 3453 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	242	Cemented
				4 1/2"	3453	2684.84

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole to 3390 feet - dumped 4 sacks of cement - bailed oil off of fluid - mudded hole to 240 feet - set 10' rock bridge bailed fluid down to rock bridge - dumped 25 sacks of cement mudded hole to 40' - set 10' rock bridge - dumped 10 sacks of cement

RECEIVED
STATE CORPORATION COMMISSION
AUG 4 1959
CONSERVATION DIVISION
Wichita, Kansas
8-4-1959

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Company
Address Box 569 Ellinwood, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
800 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of August, 1959
[Signature] Notary Public.

My commission expires August 10, 1961

PLUGGING
FILE SEC. 22 T. 20 R. 12W
BOOK PAGE 52 LINE 35

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: November 12, 1958

Contractor: Quaker Drilling Co., Inc.

Completed: November 20, 1958

Louise Rolfs No. 2
SE NW SE Sec. 22-20S-12W
Barton County, Kansas

Elevation: 1827 KB

Casing Record

Set 8 5/8" casing at 242 feet with 250 sacks pozmix
Set 4 1/2" casing at 3453 feet with 150 sacks pozmix

(Figures Indicate the Bottom of the Formations)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Surface Soil & Sand	145	Anhydrite	601
Shale and Shells	242	Heebner	3007 -1180
Shale and Red Bed	601	Brown Lime	3130 -1303
Anhydrite	632	Lansing	3148 -1321
Shale and Shells	1580	Arbuckle	3389 -1561
Lime and Shale	1730	Rotary Total Depth	3453 -1626
Sandy Lime and Shale	1895		
Shale and Shells	2260		
Shale	2420		
Shale and Shells	2650		
Lime and Shale	3220		
Lime	3300		
Shale and Lime	3389		
Dolomite and Shale	3453		

We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the SE NW SE. of Section 22, Township 20 South, Range 12 West, Barton County, Kansas.

QUAKER DRILLING CO., INC.

By:

Thomas M. McCaul
Thomas M. McCaul, President

SUBSCRIBED AND SWORN to before me a Notary Public this 25th day of November, 1957.

Virginia Mandell
Virginia Mandell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1961

RECEIVED
STATE COMMISSION

AUG 4 1959

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING

FILE SEC 22T.20S.R.12W
BOOK PAGE 52 LINE 35