


DISTRICT CONSERVATION AGENT'S REPORT

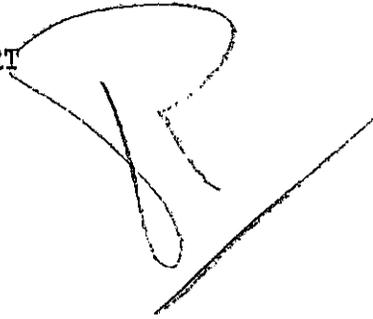

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION CEL
21E-21E-21E

SEC. 21 TWP. 20 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 2 Lease Nagaw

Operator Brannin-Hall Address #822 Central Bldg. Wichita-Kans

Field _____ County Barton

Total Depth 3367 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 259 ft. Circulated with cement
5/8 casing set at 3308 ft. - 125 sacks of cement - Level Wells.
Plug at 3160 ft. - Filled hole with sand to 3050 ft. - Dumped
5 sacks of cement at 3050 ft. - ricked off & pulled the
5/8 casing - mud to 260 ft. - Set Rock Bridge &
15 sacks of cement at 260 ft. mud to 35 ft. -
Bridge & 10 sacks of cement at the surface.

PLUGGING
FILE SEC 21 T 20 R 11W
BOOK PAGE 139 LINE 4V

C. H. Stovall
District Conservation Agent

Date 1-20-52

JAN 23 1952

1-23-52

OFFICE OF THE DISTRICT CONSERVATION AGENT
WICHITA, KANSAS