

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas



FILE NO. 31-36LOCATION Nw-Nw-NwSEC. 21 TWP. 20 RGE. 11 WDry Hole Abandoned Oil Well Abandoned Gas Well

I have this date completed supervision of plugging of:

Well No. 1 Lease MeggarsOperator Isern Drly. Co. Address Ellinwood Kans.Field _____ County BartonTotal Depth 3350 Feet.Plugging Contractor West Supply Co.Plugging Contractor's License No. 14Address Chase Kans.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 5/8" @ 260' c.w.c. Oil String 5 1/2" @
 3323 w/100 sx Cem. Plugged back to 3316' top
 plug 3284' Filled back with sand to 3270' and
 dumped 5 sx Cem. Shot off and pulled 5 1/2" casing
 Mud to 260' set 15' rock bridge and run 20
 sx Cem with dump bailer. Mud to 35' rock
 bridge and 10 sx Cem to base of collar

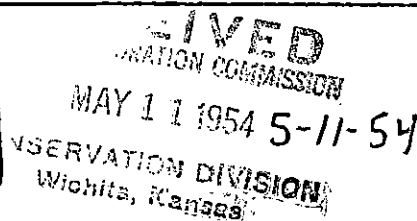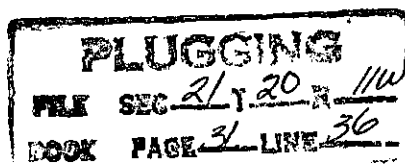

Warren H. Harnes
 District Conservation Agent

Date May 8, 1954