

L O G

FERRIER DRILLING CO, ET AL.
Brown #1 - NW c SW $\frac{1}{4}$ SE $\frac{1}{4}$ Sec. 28-20S-12W
Barton County, Kansas

Elevation: 1843


Drilling commenced: Feb. 27, 1946
" completed: Mar. 15, 1946

Contractor: Ferrier Drilling Co
Wichita, Kansas

TD-3496' D&A

Figures indicate bottom of formations:

Sand	187
Shale & broken lime	295
Ran 280 ft. 10" Casing	
Red bed & shale	918
Shale & shells	1005
Shale, Salt & shells	1100
Shale & salt	1225
Lime & shale	1275
Shale	1300
Sand & shale	1390
Shale	1450
Lime	1474
Lime & shale	1518
Lime & sand	1545
Lime	1585
Lime & sand	1610
Lime & shale	1642
Lime & sand	1652
Lime & shale	1660
Lime	1720
Sand & shale	1810
Broken lime & sand	1845
Lime	1860
Shale	1880
Lime	1930
Lime & shale	1985
Broken lime & shale	2060
Broken lime	2080
Sandy shale	2100
Lime	2155
Broken lime & shale	2486
Shale & shells	2546
Shale & lime	2690
Lime	2826
Broken lime	2854
Lime	2990
Lime & shale	3035
Lime	3115
Lime & shale	3171
Lime	3336
Lime sandy	3375
Broken lime	3411
Conglomerate	3449
Dolomite	3496 T.D.

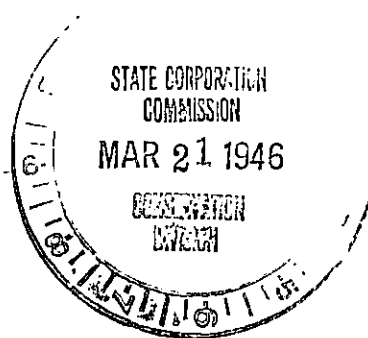

I, J. L. Ferrier, hereby certify that the above and foregoing is a true and correct copy of the log of the Brown #1, Sec. 28-20S-12W, and that said well was dry and has been plugged and abandoned at the total depth of 3496 feet.

28 20 12W
47 27

J. L. Ferrier

Subscribed and sworn to before me this 19th day of Mar. 1946.

E. A. Schum
Notary Public.

My commission expires 9-24-49.