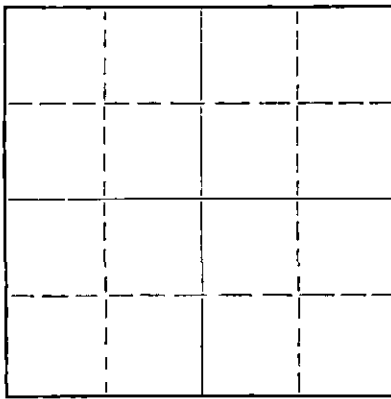


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

Locate well correctly on above
Section Plat

Barton County, Sec. 28 Twp. 20 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines NE/SW/NW

Lease Owner C-G Drilling Company

Lease Name Anderson Well No. #5

Office Address

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed Yes 19

Application for plugging approved Yes 19

Plugging commenced 8-20 19 57

Plugging completed 8-23 19 57

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. R.M. Brundedge

Producing formation Depth to top Bottom Total Depth of Well 3462' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,591'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured into TD 3462'.

Plugging started 8-20-57. Finished 8-23-57.

Plugged off bottom with sand to 3425' and dumped 5 sacks cement with bailer. Shot 5 1/2" casing at 2,591'. Pulled pipe out of hole and plugged well with mud to 230' and set permanent rock bridge. Dumped 20 sacks cement. Filled hole with heavy mud to 35' and mixed 10 sacks for cap on well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.

Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J.O. Forbes

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

J. O. Forbes
Box 221, Great Bend, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of August, 1957

My commission expires November 8, 1960.

Betty S. Edman

RECEIVED Notary Public.

STATE CORPORATION COMMISSION

8-27-57
AUG 27 1957CONSERVATION DIVISION
Wichita, Kansas

PLUGGING

FILE SEC 28 T. 20 R. 12W

BOOK PAGE 34 LINE 28

WELL LOG

Anderson #5

NE SW NW

Barton County, Kansas

0 - 60	Sand
60 - 150	Sand and Shale
150 - 600	Red bed
600 - 627	Red bed and shale
627 - 657	Anhydrite
657 - 1850	Shale and Shells
1850 - 2100	Lime-Fort Riley
2100 - 3000	Shale and Shells
3000 - 3048	Lime
3048 - 3068	Heebner Shale

PLUGGING

FILE SEC. 28 T. 20 R. 12W

BOOK PAGE 34 LINE 20