


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

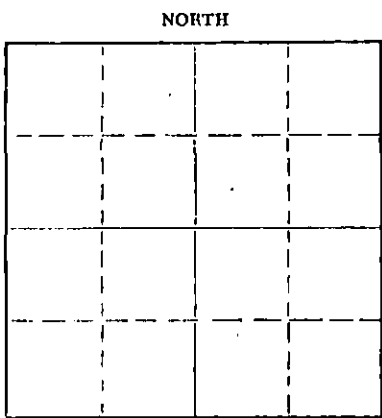

Locate well correctly on above  
Section Plat

Barton County, Sec. 28 Twp. 20 Rge. 12 (W)  
Location as "NE/CNW/SW" or footage from lines SW - NE - SW  
Lease Owner L. K. Parrish  
Lease Name Lyda  
Office Address 714 11th Natl. Bldg. Wichita Well No. 3  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 3-13 1967  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 4-22 1967  
Plugging completed 4-28 1967  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3468 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled with sand from 3456' to 3420' run 5 sacks  
of cement 3420' to 3390'  
Pumped 15 sacks of gel mud & 70 sacks  
of cement to Plug 8 5/8" pipe

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 4 1969  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Ellis & Associates Plugging Co.  
Address Box 156 Ellinwood, Kansas

STATE OF Kansas COUNTY OF Sedgewick, ss.  
L. K. Parrish (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) L. K. Parrish

SUBSCRIBED AND SWORN to before me this 3rd day of June, 1969  
L. M. Whiting (Address)  
My commission expires May 10, 1970 Notary Public.

15.009.19513.0000  
RECEIVED  
STATE CORPORATION COMMISSION  
APR 15 1969  
CONSERVATION DIVISION  
Wichita, Kansas

WELL LOG

L. K. PARRISH

Commenced: February 21, 1959

Contractor: Quaker Drilling Co., Inc.

Completed: March 1, 1959

Lyda No. 3

Elevation: 1857 KB

SW NE SW Sec. 28-20S-12W  
Barton County, Kansas

Casing Record:

Set 8 5/8" casing at 275 feet with 240 sacks cement  
Set 5 1/2" casing at 3450 feet with 125 sacks cement

(Figures Indicate the Bottom of the Formations)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>
Surface Soil & Gravel	215	Heebner 3054 -1197
Shale	275	Brown Lime 3178 -1321
Shale and Shells	300	Lansing 3200 -1343
Red Bed	637	Base of Kansas
Anhydrite	665	City 3413 -1556
Shale and Shells	1470	Arbuckle 3435 -1578
Lime and Shale	1565	Rotary Total
Sandy Lime	1680	Depth 3451 -1594
Lime and Shale	3160	
Shale	3179	
Lime	3225	
Lime and Shale	3312	
Lime	3435	
Dolomite	3441	
Dolomite and Shale	3449	
Dolomite	3451	


We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the SW NE SW of Section 28, Township 20 South, Range 12 West Barton County, Kansas.

QUAKER DRILLING CO., INC.

By:

  
Thomas M. McCaul, President

SUBSCRIBED AND SWORN TO before me a Notary Public this 3rd day of March, 1959.

  
Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:  
August 10, 1961