


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Barton County, Sec. 17 Twp. 20S Rge. 11 (X) (W)

Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner Sohio Petroleum Company
Lease Name Herter Well No. 3
Office Address Box 673, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well (abandoned)
Date well completed April 25, 1947 19
Application for plugging filed December 27, 1954 19
Application for plugging approved December 27, 1954 19
Plugging commenced January 8, 1955
Plugging completed January 15, 1955
Reason for abandonment of well or producing formation _____

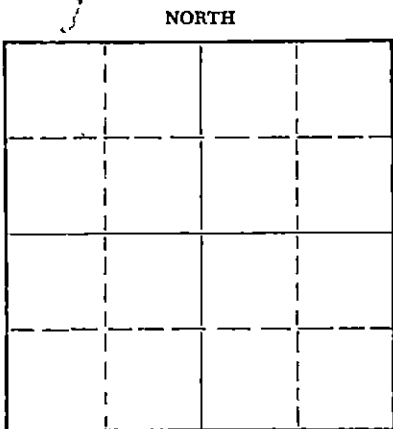

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3310' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	242'	None
				5-1/2"	3297'	1713'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with sand from 3310' to 3287' and ran 5 sacks of cement. Mudded the hole to 240', set a 10' rock bridge and ran 25 sacks of cement. Mudded hole to 30', set a 10' rock bridge and ran 10 sacks of cement on top. Plugging completed.

1-26-1955


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Co., Inc.
Address Chase, Kansas

STATE OF Kansas COUNTY OF Russell, ss.
J. N. Bond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. N. Bond
(Address) _____

SUBSCRIBED AND SWORN to before me this 25 day of Jan, 1955

My Commission Expires July 2, 1957
My commission expires _____
Russell M. Miller Notary Public.



LOG

<u>From</u>	<u>To</u>	<u>Formation</u>
0	7	Rig and Cellar
7	90	Sand
90	180	Shale and Shells
180	200	Sand
200	242	Shale
242	518	Red Bed
518	540	Anhydrite
540	760	Shale and Shells
760	950	Shale and Salt
950	1378	Shale and Shells
1378	1480	Brk. Lime
1480	1565	Lime
1565	1705	Brk. Lime
1705	1725	Sand
1725	1765	Brk. Lime
1765	1935	Lime
1935	2080	Brk. Lime
2080	2385	Shale and Shells
2385	2725	Brk. Lime
2725	2929	Lime
2929	3044	Shale
3044	3299	Lime
3299	3301	Arb. Lime
XXXX		

PLUGGING
 FILE SEC—T—R—
 BOOK PAGE—LINE—

RECEIVED
 1952 JUN 11
 11 2 11
 11 2 11