

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. 68-32LOCATION NEC-SE/4SEC. 10 TWP. 20 RGE. 11Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

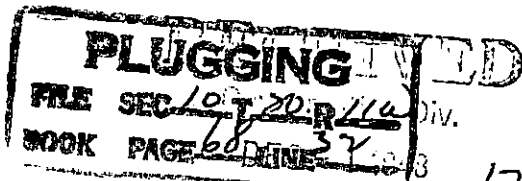
Well No. 1 Lease WherrierOperator C. H. Adair Oil Co Address #407 W. K. H. Bldg - Wichita - Kans.Field _____ County BartonTotal Depth 3332 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2" - 192 ft - Circulated with cement
 5 1/2" casing set at 3302 ft - cemented & Well Tested
 Filled back from bottom to 3300 ft with chert -
 Runched 5 sacks of cement at 3300 ft - Shot off &
 Pulled 5 1/2" casing - Filled with mud to 192 ft - Set
 back Bridger & 15 sacks of cement at 192 ft - Mud
 to 30 ft - Plug & 10 sacks of cement at the surface

C. D. Stough

District Conservation Agent

Date 11-27-48

STATE CORPORATION
 COMMISSION
 KANSAS