


RECEIVED  
STATE CORPORATION COMMISSION  
AUG 20 1974 8-20-74

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD  
CONSERVATION DIVISION  
Wichita, Kansas FORM CP-4

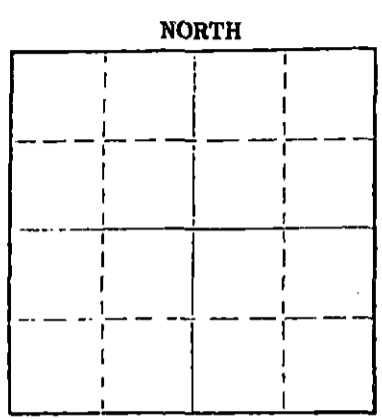

Locate well correctly on above Section Plat

McPherson County, Sec. 2 Twp. 19S Rge. 1 (E) (W) XX  
Location as "NE/CNW&SW&" or footage from lines SE SE NW  
Lease Owner National Oil Co.  
Lease Name Nightingale Well No. 1  
Office Address 200 West Douglas, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) D&A  
Date well completed August 11 19 74  
Application for plugging filed August 11 19 74  
Application for plugging approved August 11 19 74  
Plugging commenced August 11 19 74  
Plugging completed August 11 19 74  
Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2908' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	137'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud to 145', 1/2 sk. hulls, plug & 25 sx cmt  
Mud to 40', 1/2 sk. hulls, plug & 10 sx cmt

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company  
Address 1720 Wichita Plaza, Wichita, Kansas


STATE OF Kansas COUNTY OF Sedgwick ss.  
D'Ann Drennan (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *D'Ann Drennan*  
1720 Wichita Plaza, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 16th day of August, 19 74

My commission expires March 8, 1977  
*Linda N. Dickens*  
Notary Public.



DRILLERS LOG

No. 1 Nightingale

CASING RECORD:	COMPANY: National Oil Co.	DESCRIPTION:
8-5/8" @137' w/100 sx cmt	CONTRACTOR: Red Tiger Drilling Co.	SE SE NW 2-19S-1W McPherson County, Kansas
TOTAL DEPTH: 2908'	COMMENCED: August 5, 1974	COMPLETED: August 11, 1974
		ELEVATION: 1538 GR

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Shale	0	137	
Shale	137	205	
Shale & Lime	205	1075	
Lime w/Shale	1075	1425	
Lime & Shale	1425	2043	
Shale & Sand	2043	2082	
Lime	2082	2908	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

*D Ann Drennan*  
D Ann Drennan

Subscribed and sworn to before me this 16th day of August, 1974.

*Linda N. Dickens*  
Notary Public

My Commission Expires:  
March 8, 1977

