


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

McPherson County, Sec. 2 Twp. 19 Rge. 1W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
330' FSL, 330' FWL, S/2 NW/4
Lease Owner Bruce Oil Co.
Lease Name Decker #2 Well No.
Office Address Rt 4, Box 1, McPherson, Ks. 67460
Character of Well (Completed as Oil, Gas or Dry Hole)

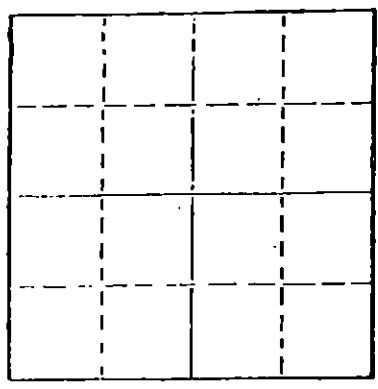

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2/25/81 19
Plugging completed 2/27/81 19
Reason for abandonment of well or producing formation
Depleted
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 2903'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	137	None
				5-1/2"	2903	2312

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran sand to 2800 and set 5 sacks cement on bottom. Shot pipe at 2300' and pulled total of 72 joints. Set rock bridge from 200 to 185' and ran 5 yards ready mix cement. Plugging complete.

RECEIVED
COMMISSION
3-4-81 MAR 4 1981

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this form)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF Kansas COUNTY OF Rice, ss.
R. Darrell Kelso (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of March, 1981

My commission expires



Joan Kelso -
Notary Public.

#15-113-20230-00-01
 JOHNSON JET
 SERVICE CO.

Radioactivity Log

COMPANY: WELL: FIELD: LOCATION: COUNTY: STATE:	COMPANY: <i>Bruce Oil Co.</i>	Well Location 330' FSL 330' FWL S½ NW¼ 2-19-1W McPherson Co.
	<i>Rt. & Box 1 McPherson Kansas</i>	
	WELL: <i>Decker # 2</i>	
	FIELD: <i>NE Ritz Canton</i>	
	LOCATION: _____	
COUNTY: <i>McPherson</i> STATE: <i>KANSAS</i>		

LOG ZERO: <i>5' A.G.L.</i>	ELEV. _____
DRLG. ZERO _____	ELEV. _____
PERM. DATUM _____	ELEV. _____

TYPE OF LOG RUN NO. <i>5313</i>	GAMMA RAY <i>Neutron</i>		
DATE <i>3-29-80</i>	ONE		
TOTAL DEPTH (DRILLER) <i>2903</i>			
TOP OF LOGGED INTERVAL <i>2200</i>			
BOTTOM OF LOGGED INTERVAL <i>2902</i>			
TYPE OF FLUID IN HOLE <i>Water</i>			
FLUID LEVEL <i>Full</i>			
SOURCE STRENGTH & TYPE SOURCE SPACING — IN. LENGTH OF MEAS. DEVICE — IN. O.D. OF INSTRUMENT — IN. TIME CONSTANT — SECONDS LOGGING SPEED FT./MIN.		<i>AMBE 241</i> <i>13"</i>	
RECORDED BY WITNESSED BY	<i>JOHNSON</i> <i>Bruce</i>		

WELL RECORD				FROM WELL RECORD		FROM LOG	
RUN	BIT SIZE	CASING	WT.—LB.				
	<i>5 1/2</i>		<i>14</i>	TO		TO	
				TO		TO	
				TO		TO	
				TO		TO	
				TO		TO	