

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

Barton County, Sec. 4 Twp. 20 Rge. (E) 11 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW NE

Lease Owner Earl F. Wakefield, et al

Lease Name Wolf Well No. 1

Office Address 307 Union National Bank Bldg., Wichita, Kans.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 1/3/ 19 42

Application for plugging filed 1/3 19 42

Application for plugging approved 1/3 19 42


Plugging commenced 1/3 19 42

Plugging completed 1/5 19 42

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	164'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

This hole was filled with mud from 3344 ft. to 160 ft. and a permanent bridge placed at 160 ft. and cemented to 10 sacks and mudded to 30 ft. and cemented to 8 ft. and mudded to top of surface.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Earl F. Wakefield

Address 307 Union National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgewick, ss.

Earl F. Wakefield (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl F. Wakefield

(Address)

SUBSCRIBED AND SWORN to before me this 9th day of January, 1942

My commission expires Jan 15, 1946

Notary Public.



Well: Wolf No. 1  
Contractor: Earl F. Wakefield  
Lease Owners: Earl F. Wakefield, et al.  
Comp: 12/19/41 Comp: 1/3/42


Description: SW NE  
4-20-11W

Pipe Record:  
8 5/8" 164'

sand & shale	130
shale & shells	160
shale & shale	350
shale & shells	400
red rock	521
anhydrite	537
shale & shells	740
red rock	800
shale & shells	1168
salt & shale	1332
shale & salt	1355
shale & lime	1400
lime broken	1495
shale & shells	1545
lime broken	1620
shale & shells	1647
lime shale	1720
lime	1784
lime broken	1800
lime & shale	1920
lime	2025
shale & shells	2071
lime broken	2200
shale & shells	2290
shale & lime	2415
lime	2453
shale	2485
lime broken	2600
lime	2628
shale	2650
lime	2716
lime cherty	2720
lime	2850
lime & shale	2887
lime	2909
lime, broken	2961
shale & shells	3025
lime	3047
lime broken	3058
lime	3087
lime & shale	3125
shale & lime	3135
lime	3140
lime soft	3169
lime	3176
lime, broken	3224
lime with shale streaks	3302
lime	3322
conglomerate	3337
artificial	3344

Total Depth

DRILLING  
FIL 20-41-20-11W  
BOOK PAGE 22 LINE 21

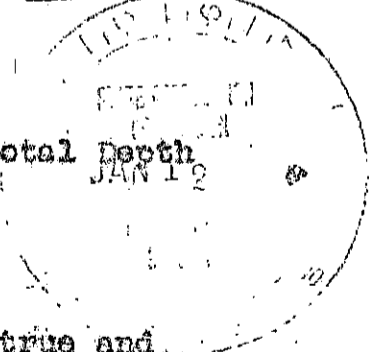

State of Kansas

County of Sedgwick

I hereby certify that the above is a true and correct copy of the log of the Wolf No. 1 well located in the SW NE 4-20-11W, Barton County, Kansas.

Earl F. Wakefield

Subscribed and sworn to before me this 9th day of January, 1942.

E. F. Wakefield  
Notary Public

My comm. expires 1/15/46