


DISTRICT CONSERVATION AGENT'S REPORT

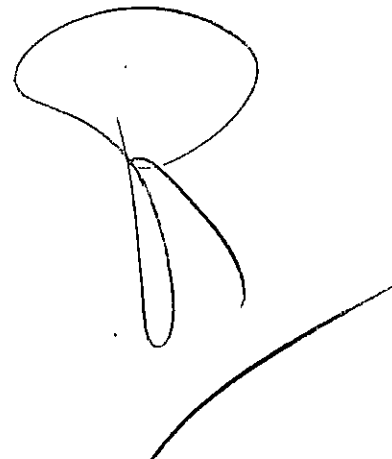

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 42-46

LOCATION SW-NE-NE

SEC. 15 TWP. 20 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 5 Lease C. Jutting

Operator Stanford Oil & Gas Co Address Box #7 - Ellinwood - Kans.

Field _____ County Barton

Total Depth 3308 Feet.

(Describe briefly the manner in which the well was plugged)

Sweeper Pipe 8 7/8 - 223 ft. Circulated with cement
5/8 casing set at 3302 ft. & cemented - Plugged
back to 3300 ft with chat - Dumped 5 sacks of cement at
3300 ft - Shot off & Pulled the 5/8 casing - Mud to 223 ft -
Set Rock Bridge & 15 sacks of cement at 223 ft -
Mud to 30 ft - Bridge & 10 sacks of cement
at the surface -

West Supply Co. Plugging Co. Ellinwood

11-27-50

RECEIVED
STATE CORPORATION COMMISSION

NOV 27 1950

CONSERVATION DIVISION

C. D. Stough

District Conservation Agent

Date 11-25-50

PLUGGING
FILE SEC 15 T 20 R 11W
BOOK PAGE 42 LINE 45