

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Barton County, Sec. 3 Twp. 20S Rge. (S) 11 (W)

Location as "NE/CNW/SW" or footage from lines NE SW SE

Lease Owner Jay Bergman Oil Company

Lease Name Panning Well No. 8

Office Address 425 Union Center Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil well

Date well completed 9-30 19 54

Application for plugging filed 9-28 19 66

Application for plugging approved 9-29 19 66


Plugging commenced 10-6 19 66

Plugging completed 10-10 19 66

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

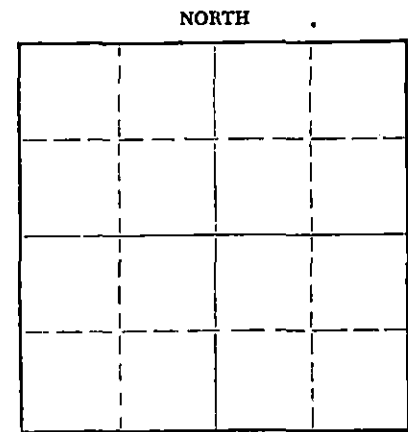

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3296 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			<u>2392</u>	<u>5-1/2</u>		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from top feet to bottom feet for each plug set.

Run 5 sacks from 3285 to 3260.  
Mud from 3260 to 165. Rock bridge from 165 to 155.  
Run 4 sacks of cement from 155 to 135.  
Run 20 sacks cement from 135 to 75. Mud from 75 to 30.  
Rock bridge and 10 sacks cement to base of cellar.

5-17-67  
**RECEIVED**  
STATE CORPORATION COMMISSION

MAY 17 1967

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Glem & Smith Pipe Pulling Co. #396  
Address Box 156, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Harold Bergman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold Bergman  
425 Union Center Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of May, 19 67

My commission expires August 2, 1970  
Harold Bergman Notary Public.

15.009-14329.0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

COPY

Company BERGMAN OIL  
Farm Panning


No. 8

SEC. 3 T. 20 R. 11W  
NE SW SE

Total Depth. 3302'  
Comm. 9-22-54  
Shot or Treated.  
Contractor.  
Issued. 2-25-61

Comp. 11-10-54

County Barton  
KANSAS



CASING:  
5" 3296'

Elevation. 1764' DF

Production. 12 BO & NW

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE

TOPS: SCOUT	
Lansing	3039
Arbuckle	3294
Total Depth	3302

RECEIVED  
OIL CONSERVATION COMMISSION

MAR 20 1967

CONSERVATION DIVISION  
Wichita, Kansas