


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

McPherson County. Sec. 6 Twp. 19 Rge. X (E) 1 (W)

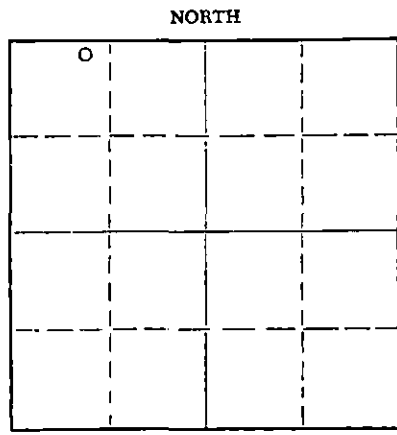

Locate well correctly on above
Section Flat

Location as "NE/CNWxSWx" or footage from lines NE NW

Lease Owner Colorado Oil Company

Lease Name Ryno Well No. 1

Office Address 915 Union Natl. Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Salt Water Disposal Well

Date well completed August 4 19 44

Application for plugging filed February 24 19 67

Application for plugging approved February 27 19 67

Plugging commenced March 9 19 67

Plugging completed March 13 19 67

Reason for abandonment of well or producing formation Well quit taking water

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3715 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	105	None
				5-1/2"	3581	889

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pulled 73 joints of tubing, cleaned cellar. Rigged up on 5-1/2" set 10 sacks of cement at 1800'. Shot pipe at 1760', 1430', 1260' and 890'. Pulled 29 joints and loaded trailer. Bailed hole to 150', set rock bridge and ran 25 sacks of mud to 40' rock bridge and ran 10 sacks of cement. Tallied pipe and moved out.

PLUGGING COMPLETE

RECEIVED
STATE CORPORATION COMMISSION

MAR 17 1967 3-17-67

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company

Address Chase, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Bill K. Henrichs (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill K. Henrichs

915 Union National Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of March, 19 67

Helen L. Martin
Helen L. Martin Notary Public.

My commission expires August 19, 1967

THE DENNY OIL COMPANY

Record of Well No. 1

Farm: Ryno

Location: NE NW NW

Sec. 6 Twp. 19 Rgo. NW

Contractor: E. K. Carey

County: McPherson

Drilling Commenced: 7-15-44

State: Kansas

Elevation: 1537

Drilling Completed: 8-4-44

CASING RECORD

size	feet	kind	weight
8 5/8"	105'		
8 1/2"	3581'	OD	14 1/2

60 Sacks Cement
200 " "

Formation	Bottom	Formation	Bottom
Surface Dirt	0- 5		
Shale & Clay	12		
Sand	43		
Shale	79	Tops:	
Shells	81	ML	2957'
Shale	100	Arb.	3503'
Rock	102	Total Depth	3715'
Shale	105		
Shale & Shells	190		
Shale & Lime	688		
Sandy Lime	895		
Shale & Lime	1035		
Shale	1575		
Shale & Lime	1970		
Shale	1795		
Lime	2077		
Shale & Lime	2180		
Sandy Shale	2200		
Shale & Lime	2304		
Shale Sandy	2310		
Lime	2692		
Shale	2712		
Lime	2728		
Shale	2733		
Lime & Shale	2828		
Shale	2862		
Lime	2888		
Shale	2942		
Cong.	2970		
Chat.	2987		
Shale, Red Bed & Chat	3023		
Lime & Chert	3061		
Misc. Lime	3120		
Lime & Chat	3131		
Misc. Lime	3150		
Shale & Lime	3185		
Shale	3317		
Lime & Shale	3352		
Shale	3419		
Shale & Lime	3463		
Lime	3715		

GEOLOGICAL SURVEY

DP 2000' water 1/2 hr. Input 110 DWPH on vacuum for 53D.

RECEIVED
FEB 27 1967
CONSERVATION DIVISION
Wichita, Kansas