


15009-14211-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

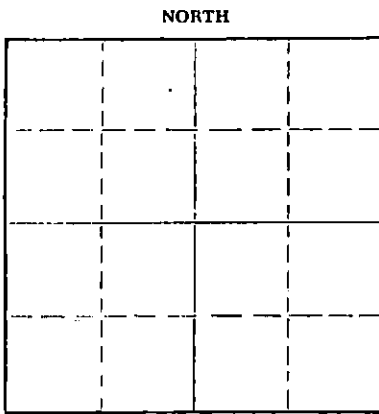

Locate well correctly on above
Section Plat

Barton County, Sec. 12 Twp. 16 Rge. 13 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SE
Lease Owner MORGENSTERN & SPECTER
Lease Name WHITNER "A" Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 8-14-57 19____
Application for plugging filed May 13, 1965 19____
Application for plugging approved May 14, 1965 19____
Plugging commenced May 17, 1965 19____
Plugging completed May 24, 1965 19____
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well DONALD TRUJAN RUSSELL, KANSAS
Producing formation Arbuckle Depth to top 3373 Bottom 3444 Total Depth of Well 3445 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				9 5/8" OD	616 ft.	none
				7" OD	3444	2759 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to 4300-feet, dumped 5- sacks cement.
Set a Rock Bridge at 370-feet, Dumped 35- sacks cement.
Mudded hole up to 30- feet, dumped ten sacks cement.

6-1-65
RECEIVED
STATE CORPORATION COMMISSION

JUN 1 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457
Address Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgenstern & Specter
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of May 1965

My commission expires December 1, 1968

Elsie Coady
Elsie Coady Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
502 East Murdock, Wichita, Kansas


COPY
15009-14211-0000

Company- PHILLIPS PETRO. CO.
Farm- Whitmer "A" No. 1

SEC. 12 T. 16 R. 13W
NW NW SE

Total Depth. 3445' PB 3414'
Comm. 7-7-57 Comp. 8-14-57
Shot or Treated.
Contractor.
Issued. 10-5-57

County Barton
KANSAS



CASING:
9 5/8" 616' w/310 sx cem.
7" 3444' w/400 sx cem.

Elevation. 1909' DE

Production. 223 BOPD / 7 EOPD

Figures indicate Bottom of Formations.

lime-shale strks	210
lime-shale-sand	465
Iron-sand	580
red bed-shale	600
red bed	746
red bed-shale	840
anhydrite	870
red bed-shale	1500
lime-shale	1735
lime	2085
lime-shale	2924
lime	3032
lime-shale	3114
lime	3445 T.D.
Total Depth PB	3414

TOPS: Elec.	
Heebner	3023
Toronto	3037
Douglas	3054
Brown limestone	3109
Lansing-Kansas City	3118
Drum	3245
Arbuckle	3373

Producing formation:
Arbuckle 3373

Perf: 3396-3399;
3386-3394

Not penetrated @ 3445' TD

RECEIVED
STATE CORPORATION COMMISSION
MAY 14 1965
CONSERVATION DIVISION
Wichita, Kansas