


DISTRICT CONSERVATION AGENT'S REPORT

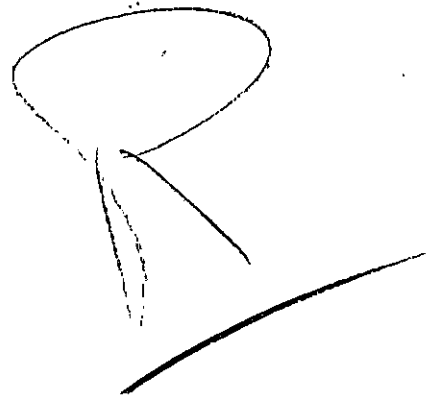

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 147-15-

LOCATION SEC. 21 TWP. 20 RGE. 11W

SEC. 21 TWP. 20 RGE. 11W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 6 Lease Fred Panning

Operator Standard Oil Co. Address Box 7 - Ellinwood - Kans.

Field _____ County Barton

Total Depth 3290 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 10 3/4 - 21250. Circulated with cement
6" casing at 3294 ft - Plugged back to 3290 ft
with chat - 6 sacks of cement dumped at 3290 ft
Shot off. Pulled fluid casing - Filled with mud
to 2125 ft. Set Rock Bridge & 10 sacks of cement
at 2125 ft. Mud to 30 ft. Bridge & 10 sacks
of cement at the surface
Pipe Pulling, Inc. Plugging Contractors

PLUGGING
FILE SEC. 11 T. 20 R. 11W
BOOK PAGE 147 LINE 15

MAY 2 - 1950 5-2-50

ST. E. O. Strong
District Conservation Agent
KANSAS

Date 4-30-50