

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-095-22082-00-00  
Spot: E2NWNESE Sec/Twnshp/Rge: 31-29S-8W  
2310 feet from S Section Line, 850 feet from E Section Line  
Lease Name: RICKARD Well #: 2-31  
County: KINGMAN Total Vertical Depth: 4294 feet

Operator License No.: 34357  
Op Name: ATLAS OPERATING LLC  
Address: 15603 KUYKENDAHL, STE 200  
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4278		220 SX
SURF	8.63	252		325 SX
T1	2.375	4173		

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/13/2018 12:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE Phone: (620) 532-9461

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: B. J. HOPE WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/16/2018 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SANDED WELL BACK TO 3650' AND CAPPED WITH 4 SKS CEMENT. RECOVERED 2440' OF 4 1/2" CASING. PULLED CASING TO 1350' SPOTTED 50 SX COMMON 3% AND 3% CACL CEMENT. TAGGED CEMENT AT 950'. PUMP 35 SX CEMENT AT 850'. PULLED CASING TO 300' AND CIRCULATED CEMENT TO SURFACE WITH 130 SX CEMENT.

Perfs:

Top	Bot	Thru	Comments
4146	4155		
3875	3878		
3840	3844		


*In voiced 7-20-11*

Remarks: QUALITY WELL SERVICE. DENIED TA

Plugged through: CSG

District: 02

Signed \_\_\_\_\_

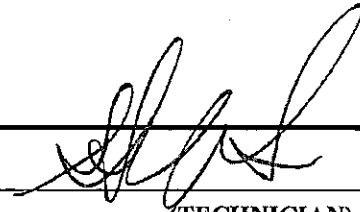

(TECHNICIAN)

*1/11*