



JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

245 North Water

WICHITA, KANSAS 67202

March 4, 1981

VERBAL PERMIT FORM (To be filed by Plugging Agent)

Dear Sir:

Mr. Larry Hinderliter of Rains & Williamson Oil Co. has this date requested permission to plug the following described well:

Operator's Full Name: Abraxas Petroleum

Complete Address: P.O. Box 17485, San Antonio, Texas 78217

Lease Name: William Miller Well No. 1

Location: CNE NE Sec. 12 Twp. 16 Rge. 13 (E) (W)

County: Barton Total Depth: 3440'

Abandoned Oil Well Gas Well Input Well SWD Well D&A

Other well as hereafter indicated: _____

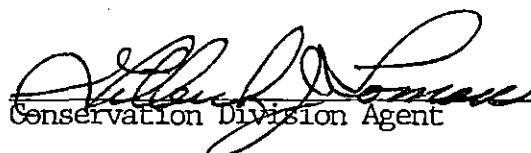
Mr. Hinderliter was instructed to plug the well as follows:

8 3/4" - 248' - 200 sacks Fill hole with mud. Pump 50 sacks 50-50 Puzmix
w/4% gel & 3% Cal. chloride through drill pipe at 600'. Pump 25 sacks
Cement through drill pipe at 245'. Fill hole with mud to 40'.
Push plug and 1/2 sack bulls to 40' and cap hole with 10 sacks
Cement. Cement rat hole with 5 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

Very truly yours,

MAR 10 1981


Conservation Division Agent

CONSERVATION DIVISION
Wichita, Kansas