

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-20410-00-00
Spot: SESW Sec/Twnshp/Rge: 27-33S-6W
660 feet from S Section Line, 1980 feet from W Section Line
Lease Name: LUDEMAN Well #: 1
County: HARPER Total Vertical Depth: 4510 feet

Operator License No.: 34192
Op Name: SANDRIDGE EXPLORATION AND PRO
Address: 123 ROBERT S. KERR AVE
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4509	1126	100 SX
SURF	8.625	240		175 SX

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 04/12/2018 12:00 AM
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.
Proposal Rcvd. from: RONNIE ORR Company: ORR ENTERPRISES, INC. Phone: (405) 429-5835

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 04/17/2018 5:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

A CIBP WAS SET AT 4400'. CIRCUALTED 100 BBLS MUD & PUMPED 15 SKS CEMENT. RECOVERED CASING FROM 1126'. LAYED DOWN AND RAN TUBING TO 1100' SPOTTED 50 SXS CEMENT. PULLED TUBING TO 700' AND SPOTTED 35 SX CEMENT. PULLED TUBING TO 300' & CIRCULATED 85 SXS CEMENT TO SURFACE.

Perfs:


INVOICED
JUL 20 2018

Remarks: ORR ENTERPRISES. CLASS 'C' CEMENT.

Plugged through: TBG

District: 02

Signed _____

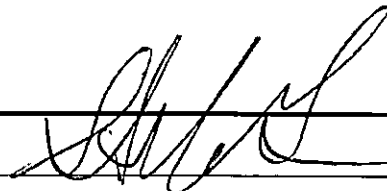

(TECHNICIAN)

JK