


WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

15-009-03473-0000

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

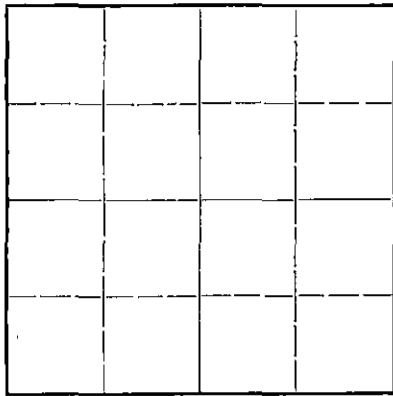

Locate well correctly on above Section Plat

Barton County. Sec. 7 Twp. 16S Rge. (E) 13 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE/4
Lease Owner. Phillips Petroleum Company
Lease Name. V. McClanshan Well No. 5
Office Address. Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed. 9-15-38 19
Application for plugging filed. 4-11-45 19
Application for plugging approved. 6-15-45 19
Plugging commenced. 7-28-45 19
Plugging completed. 8-2-45 19
Reason for abandonment of well or producing formation. At rate of production, well was unprofitable to operate
If a producing well is abandoned, date of last production. 5-26-45 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. H. Kerr
Producing formation. Arbuckle Depth to top. 3369' Bottom. Total Depth of Well. 3379' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Arbuckle Lime</u>	<u>Oil</u>	<u>3369</u>	<u>3379</u>	<u>10 3/4"</u> <u>7"</u>	<u>591</u> <u>3369</u>	<u>None</u> <u>1882'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped 5 sacks of cement on bottom at 3379', filling to 3358'. Filled with mud from 3358' to 200'. Ran 15 sacks of cement at 200'. Filled with mud to 15'. Ran 10 sacks at 15' in filling to base of cellar.

PLUGGING
FILE 15-009-03473-0000
BOOK PAGE 16 LINE 23

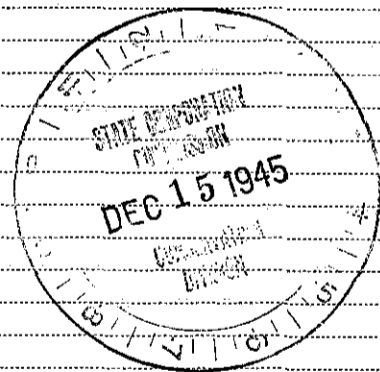

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Ralph McKnight
Address. Box 528 Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Ralph McKnight (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph McKnight
Box 528 - Russell, Kansas
(Address)

Subscribed and Sworn to before me this 12th day of December, 1945

My commission expires June 14, 1948

Robert T. Mason
Notary Public.

Formation Record

Lease V. McElanahan

Well No. 5

FROM	TO	Formation	REMARKS
0	230	Surface	
230	550	Shale & Shells	
550	580	Shale	
580	585	Lime	
585	900	Shale & Shells	
900	940	Lime	
940	1090	Red Rock	
1090	1350	Shale & Shells	
1350	1585	Shale	
1585	1780	Shale & Shells	
1780	1877	Lime	
1877	1950	Shale & Shells	
1950	2135	Lime	
2135	2160	Shale	
2160	2180	Lime	
2180	2200	Shale	
2200	2347	Lime	
2347	2470	Shale	
2470	2490	Lime	
2490	2540	Shale & Shells	
2540	2610	Shale	
2610	2630	Lime	
2630	2672	Shale	
2672	2699	Lime	
2699	2845	Shale & Shells	
2845	3040	Lime	
3040	3055	Shale	
3055	3360	Lime	
3360	3369	Shale	
3369	3379	Lime (Total Depth)	Top Arbuckle 3369'

mt

