

15-009-034 7/0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Barton County, Sec. 7 Twp. 16 Rge. 13 (E) (W)

Location as "NE/CNWSW¼" or footage from lines 330 FNL 1320 FEL SE/4
Lease Owner Phillips Petroleum Company
Lease Name McClanahan #3 Well No.
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 8-3-72 19
Application for plugging approved 8-4-72 19
Plugging commenced 8/26/72 19
Plugging completed 8/29/72 19
Reason for abandonment of well or producing formation depleted.

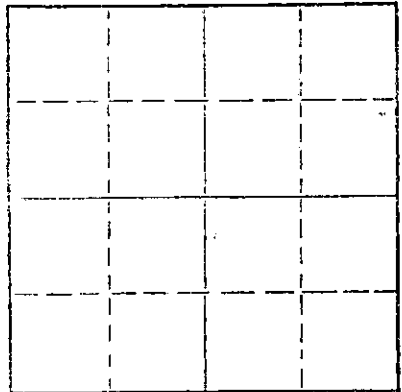

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation Depth to top Bottom Total Depth of Well 3361' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	595	none
				7"	3355	1198'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked bottom, ran sand to 3330', from 3330 to 3305' 5 sacks of cement. Pulled 33 joints, set 25' rock bridge 411'. Plugged as follows: 3361 to 3330' sand, 3330 to 3305' 5 sacks of cement, 3305 to 411' mud and fluid, 411 to 385' rock, 385 to 0 9 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
SEP 13 1972
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Noel Knight*
CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 11th day of September, 1972.

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.

My commission expires

Formation Record

15-009-03471-0000

Lease

V. MCCLANAHAN

Well No.

3

FROM	TO	KIND	HARDNESS	COLOR	REMARKS
0'	100	Red rock & hard sand			
100	350	Shale			
350	597	Sandy shale & shells			
597	890	Red beds & shale			
890	925	Anhydrite			
925	1135	Red rock - 1 dg. off @ 1000'			
1135	1300	Shale & lime shells			
1300	1575	Salt - 1-dg. off @ 1500ft			
1575	2460	Shale & lime shells - 1 degree off @ 2000'			
2460	2585	Shale - 1 degree off @ 2500'			
2585	2760	Shale & hard lime shells			
2760	2805	Shale			
2805	3055	Lime			
3055	3115	Lime & shale			
3115	3150	Lime			
3150	3215	Broken Lime & shale			
3215	3357	Lime			
3357	3361	Lime - Cable tools			

RECEIVED
STATE CORPORATION COMMISSION

SEP 13 1972

CONSERVATION DIVISION
Wichita, Kansas