


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

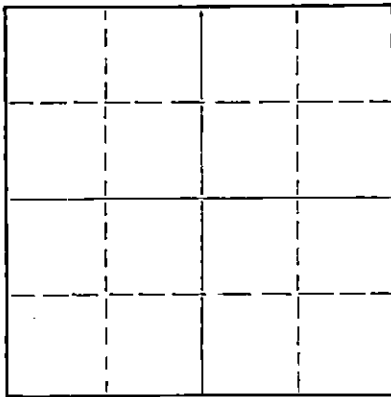

Locate well correctly on above
Section Plat

McPherson

County. Sec. 7 Twp. 19 Rge. (E) 1 (W)

Location as "NE/CNW/SW" or footage from lines

SW SENE

Lease Owner. Barbara Oil Company

Lease Name J.H. Wedel "B" #7 Well No. 7

Office Address 322 Central Building, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed April 8, 19 49

Application for plugging filed Dec. 1, 19 55

Application for plugging approved Dec. 2, 19 55

Plugging commenced Dec. 9, 19 55

Plugging completed Dec. 15, 19 55

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production November 5, 19 55

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Mississippi Depth to top 2969 Bottom Total Depth of Well 2990 Feet

Show depth and thickness of all water, oil and gas formations.

PB 2980

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	146'	None
				5 1/2"	2976'	2482'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged bottom of hole with sand from 2980 to 2965. 6 sacks cement on top of sand. filled hole with mud to 140'. rock bridge 15'. 15 sacks cement. filled hole with mud to near top and put 5 sacks cement on top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barbara Oil Company
Address 322 Central Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L.W. Davidson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L.W. Davidson

Gen. Supt.



322 Central Bldg., Wichita 2, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 19th day of December, 19 55

My commission expires March 2, 1957

Notary Public.

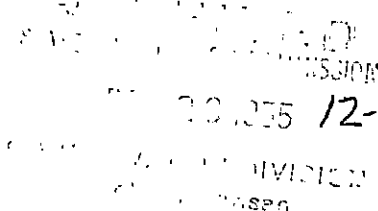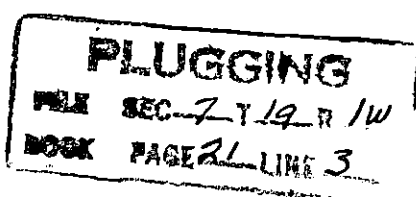

J. H. Wedel No. 7 Well

SW, SE, NE,
Section 7-19S-1W,
McPherson County, Kansas

Drilled for: Barbara Oil Company
Drilled by: Beardmore Drilling Co.

Casing Record:

8-5/8" 146' w/100sks
5-1/2" 2976'

Drilling Commenced: February 11, 1949.
Drilling Completed: February 19, 1949.


FORMATION	DEPTH
Surface soil	15
Sand	120
Shale - shells	146
Shale - lime	475
Lime - shale	925
Shale - shells	1325
Shale - shells	1810
Lime - shale	2140
Sandy shale	2230
Lime - shale	2290
Lime broken	2375
Lime - shale	2972
Chat	2976 T. D.
DD Lime	2976 to 2990 TD

STATE OF KANSAS

ss

COUNTY OF SEDGWICK

I, the undersigned, being duly sworn on oath, state that the above and within statement is a correct and true log and record of the well drilled on the location above-described to the best of my knowledge and belief.


Heber Beardmore

Subscribed and sworn to before me this
24th day of February, 1949.


Notary Public

My Commission Expires:

June 27, 1952.

DRILLING
FILE SEC 7-19S-1W
BOOK PAGE 21 LINE 3

RECEIVED
STATE OF KANSAS
DEPT. OF REVENUE
COMMERCIAL TAX DIVISION
FEB 24 1949