


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Barton County. Sec. 2 Twp. 20 Rge. 11 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SE
Lease Owner ~~XXXXXXXXXXXXXXXXXXXX~~ Clinton Oil Company
Lease Name W. M. Panning A#2 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10/10/73 19____
Plugging completed 10/29/73 19____
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3292 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 10-3/4 | 188 | none |
| | | | | 6" | 3281 | 1919 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 1350', knocked bridge out, plugged off bottom with sand to 3000' and ran 5 sacks cement. Shot pipe at 2111', 2014', 1921', pulled 62 joints. Allied pumped 20 sacks gel, 1 sack hulls, and 100 sacks cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 5 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of October, 19 73

My commission expires _____

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975


Margaret Melcher
Notary Public.

STANOLIND OIL AND GAS COMPANY

WELL RECORD

640 Acres

9-11-37

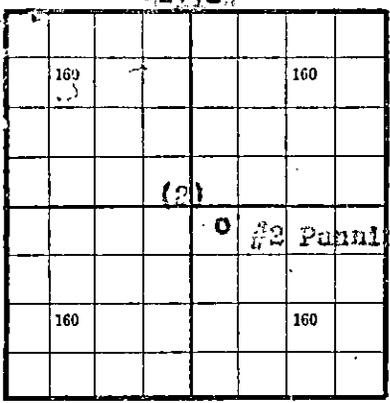

Locate Well Correctly

COUNTY Warton, SEC. 2, TWP. 20 S, RGE. 11-W
 COMPANY OPERATING Stanolind Oil and Gas Company
 OFFICE ADDRESS P. O. Box 591, Tulsa, Oklahoma
 FARM NAME Wm. Panning WELL NO. 2
 DRILLING STARTED 8/12 19 37 DRILLING FINISHED 9/15 19 37
 WELL LOCATED N 7 1/4 N 7 1/4 S 2 1/4 2310 ft. North of South
 Line and 330 ft. East of West Line of Quarter Section.
 ELEVATION (Relative to sea level) DERRICK FLR. 1769 GROUND 1765
 CHARACTER OF WELL (Oil, gas or dry hole) Oil

OIL OR GAS SANDS OR ZONES

| Name | From | To | Name | From | To |
|------------------------|------|------|------|------|----|
| 1 Siliceous Lime (D F) | 3231 | 3292 | | | |
| 2 | | | | | |
| 3 | | | | | |

WATER SANDS

| Name | From | To | Water Level | Name | From | To | Water Level |
|------|------|----|-------------|------|------|----|-------------|
| 1 | | | | | | | |
| 2 | | | | | | | |
| 3 | | | | | | | |

CASING RECORD

| Size | Wt. | Thds. | Make | Amount Set | | Amount Pulled | | Packer Record | | | | |
|------|-----|-------|---------|------------|-----|--------------------------------|-----|---------------|--------|-----------|------|--|
| | | | | Ft. | In. | Ft. | In. | Size | Length | Depth Set | Make | |
| 13 | 40 | 8 | Pitts'b | 187 | 0 | (Threads off. Set at 133' 0") | | | | | | |
| 6" | 20 | 10 | Nation | 3276 | 5 | (Threads off. Set at 3231' 0") | | | | | | |

Liner Record: Amount _____ Kind _____ Top _____ Bottom _____

CEMENTING AND MUDDING RECORD

| Size | Amount Set | | Sacks Cement | Chemical | | Method Cementing | Amount | Mudding Method | Results (See Note) |
|------|------------|-----|--------------|----------|-------------|------------------|--------|----------------|--------------------|
| | Feet | In. | | Gal. | Make | | | | |
| 13 | 187 | 0 | 200 | | Halliburton | | | | |
| 6 | 3203 | 2 | 100 | | Halliburton | | | | |

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 7 1973
 CONSERVATION DIVISION
 Wichita, Kansas

NOTE: What method was used to protect sands when outer strings were pulled?

NOTE: Were bottom hole plugs used? If so, state kind, depth set and results obtained

TOOLS USED

Rotary tools were used from 0 feet to 3236 feet, and from _____ feet to _____ feet.
 Cable tools were used from 3236 feet to 3292 feet, and from _____ feet to _____ feet.
 Type Rir 24 Steel

PRODUCTION DATA

2 hrs. Well scrubbed 62 bbls. oil p r hr. 1600 ft. off bottom, thru 6" casing, after acidizing
 Production first 24 hours _____ bbls. Gravity _____ Emulsion _____ per cent, Water _____ per cent
8 hrs. State Potential. Well pumped 1962 bbls. oil, no water, pumping 33-64" SPW, thru 6"
 Production second 24 hours _____ bbls. Gravity _____ Emulsion _____ per cent, Water _____ per cent
 Casing, 3" tubing 9/15/37
 If gas well, cubic feet per 24 hours _____ Rock Pressure, lbs. per square inch _____

I, the undersigned, being first duly sworn upon oath, state that this well record is true, correct and complete according to the records of this office and to the best of my knowledge and belief.

[Signature]
 Name and Title

Subscribed and sworn to before me this 27 day of October, 1937

My commission expires May 8, 1941
[Signature] Notary Public.

