


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

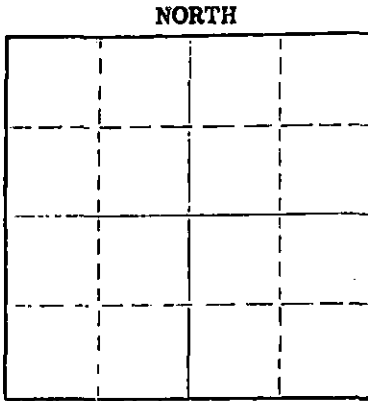

Locate well correctly on above  
Section Plot

Rice County, Sec. 21 Twp 20S Rge. 10W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C SW/4  
Lease Owner MAPCO, Inc.  
Lease Name Schurr Well No. 1  
Office Address 1437 S. Boulder, Tulsa, Oklahoma 74119  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed March 11 19 75  
Application for plugging filed March 11 19 75  
Application for plugging approved March 11 19 75  
Plugging commenced March 11 19 75  
Plugging completed March 11 19 75  
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2564' feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	249.83'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud to 500' spot 40 sx. cmt.  
Mud to 250' spot 25 sx. cmt.  
Mud to 40' 1/2 sk. hulls &  
plug w/10 sx. cmt.  
Plug rathole.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Red Tiger Drilling Co.  
Address 1720 Wichita Plaza, Wichita, Kansas 67202


STATE OF Kansas COUNTY OF Sedgwick ss.  
Linda H. Dickens (employee of owner) or (XXXXXXXXXXXX) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens  
1720 Wichita Plaza, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of March, 19 75

My commission expires December 28, 1977  
D'Ann Drennan Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION  
MAR 24 1975  
CONSERVATION DIVISION  
Wichita, Kansas  
3-24-75

15.159.20537.0000

DRILLERS LOG

No. 1 Schurr

CASING RECORD:	COMPANY:	MAPCO, Inc.	DESCRIPTION:
8-5/8" @ 249.83' w/225 sx. cmt.	CONTRACTOR:	Red Tiger Drilling Co.	C SW/4 21-20S-10W Rice County, Kansas
	COMMENCED:	3-04-75	
	COMPLETED:	3-11-75	

TOTAL DEPTH: 2564'

ELEVATION: 1757' R.B.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Hole	0	43	
Shale	43	190	
Redbed & Shale	190	415	
Redbed	415	428	
Anhydrite	428	436	
Shale & Shells	436	845	
Shale	845	1200	
Shale & Lime	1200	1404	
Krider	1404	1412	
Winfield	1412	1435	
Shale & Lime	1435	1680	
Lime & Shale	1680	1955	
Shale & Lime	1955	2127	
Lime	2127	2206	
Shale, Lime & Sand	2206	2310	
Lime	2310	2380	
Shale & Lime	2380	2544	
Sand	2544	2557	
Lime	2557	2564	

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 24 1975  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens  
Linda H. Dickens

Subscribed and sworn to before me this 13th day of March, 1975.

D'Ann Diennan  
Notary Public

