

WELL PLUGGING RECORD


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR  
~~WELL PLUGGING RECORD~~

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

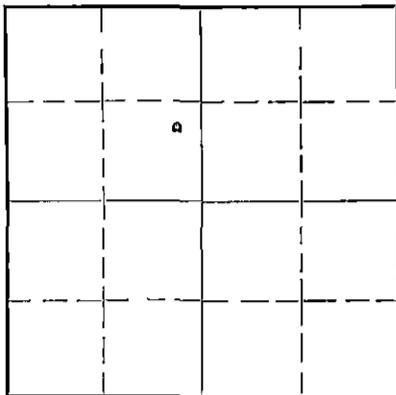

Locate well correctly on above  
Section Plat

Rice County. Sec. 21 Twp. 20S Rge. (E) 10(W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE - SE/4 - NW/4  
Lease Owner Sinclair Prairie Oil Co.  
Lease Name L. A. Thompson Well No. 6  
Office Address McPherson, Kansas.  
Character of Well (Completed as Oil, Gas or Dry Hole) Oil  
Date, well completed Feb. 8th 1935  
Application for plugging filed Sept 27 1938  
Application for plugging approved Sept 28 1938  
Plugging Commenced 9-30-38 1938  
Plugging Completed 10-4-38 1938  
Reason for abandonment of well or producing formation dry  
If a producing well is abandoned, date of last production January 1938  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?  
yes

Name of Conservation Agent who supervised plugging of this well Guy Wershing  
Producing formation silicious Depth to top 3339 Bottom 3345 Total Depth of Well 3345 Feet.  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle Lime	dry	3339	3345TD	13"OD 7"OD	130' 3338'	none 2718'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.  
Cement plug set from 3345 feet to 3126 feet. Filled with mud fluid for 3126 feet to 225 feet. Wood plug set at 225 feet to 222 feet. Filled with cement from 222 feet to 185 feet (20 sacks) Filled with mud fluid from 185 feet to 10 feet. Filled with cement from 10 feet to top of hole (7 sacks)

10-6-38



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sinclair Prairie Oil Company  
Address Box 650, McPherson, Kansas.

STATE OF Kansas COUNTY OF McPherson ss.  
I, O.E. Randolph (employee of owner) or (owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) O.E. Randolph  
McPherson Kan  
(Address)

SUBSCRIBED AND SWORN TO before me this 5 day of October, 1938

My commission expires 3/17/41  
Notary Public.

## SINCLAIR PRAIRIE OIL COMPANY

## WELL LOG


Lewis A. Thompson #6  
E/2, NW/4, Sec.21-20S-10W Rice Co. Kas.  
990 ft from South & 330 ft from East Line

Original Drilling Completed on  
2/8/35 TD 3344' in Arbuckle

Later P.B. to TD 3342' in Arbuckle  
Later P.B. to TD 3156' in Chat

## Drillers Log

Surface Soils	130'
Shale & Shells	990
Salt	1170
Shale & Shells	1300
Lime	1450
Shale & Shells	1510
Lime	1525
Shale	1550
Lime	1600
Lime & Shale	1657
Lime	1685
Shale	1715
Shale & Shells	1912
Shale	2040
Lime	2080
Shale	2178
Lime	2205
Shale	2310
Lime	2340
Shale & Shells	2425
Lime	2552
Shale	2590
Lime	2630
Shale	2652
Lime	2887
Shale & Shells	2956
Shale	3030
Lime KC top 3030	3225
Shale	3337
Lime	3344



Aug 19, 1938 began P.B. from TD 3156' in Chat to test K.C.  
Cemented back from 3154-3105 cement did not set  
Recemented 3140-3100  
Perforated in KC with 80 shots 3042-3097 no oil showing  
Shut down to abandon.  
See our letter June 10, 1938 advising that this well would  
be plugged back to KC.

PLUGGING	
FILE SEC	21-20-10W
BOOK PAGE	25 LINE 32