


DISTRICT CONSERVATION AGENT'S REPORT

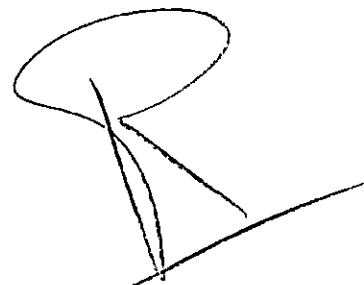

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 146-22

LOCATION NW-NW-SE

SEC. 2 TWP. 20 RGE. 11E

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 7 Lease A. Schartz

Operator Standard Oil of Kansas Address Box #7 - Ellinwood - Kansas

Field _____ County Barton

Total Depth 3296 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 10 3/4 - 222 ft. Circulated with cement.
7" casing set at 3280 ft. Plugged back to 3275 ft
with sand & chat - then mixed 6 sacks of cement at
3275 ft. - Shot off & pulled the 7" casing - Filled
with mud to 222 ft - Back Bridger & 20 sacks of
cement at 222 ft - Mud to top - Bridger &
10 sacks of cement at the surface -
R & S - Pipe Pulling Co - Plugging Contractor

5-1-50

MAY 1 - 1950

STATE CORPORATION
COMMISSION

District Conservation Agent

Date 4-27-50

PLUGGING
FILE SEC 2 T 20 R 11E
CJOK PAGE 146 LINE 22