


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Rice County, Sec. 18 Twp. 20 Rge. XXX 10 (W)
Location as "NE/CNWSW" or footage from lines. C N/2 SE/4 NE/4
Lease Owner Sohio Petroleum Company
Lease Name Mantel Well No. 4
Office Address Box 673, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 8-29 19 41
Application for plugging filed 12-7 19 65
Application for plugging approved 12-8 19 65
Plugging commenced 12-31 19 65
Plugging completed 1-5 19 66
Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production December 19 65
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

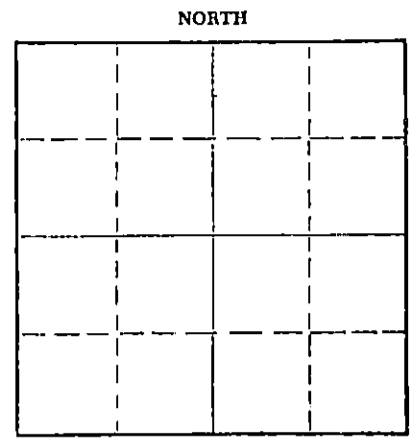

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Arbuckle Depth to top _____ Bottom _____ Total Depth of Well 3332 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
				8 5/8	200'	---
				5 1/2	3320'	1503'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped 75 gallons sand, bridge at 2060'. Pulled pipe. Bailed to 190', set 10' rock bridge, dumped 20 sacks cement, mudded hole to 30', 5' rock bridge. Capped with 10 sacks cement to surface.

RECEIVED
STATE CORPORATION COMMISSION

JAN 7 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
J. H. Bond (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. H. Bond
(Address) _____

SUBSCRIBED AND SWORN to before me this 6th day of January, 19 66

My commission expires November 18, 1967 Deanne Becker Notary Public.

Well No. 4

2/2 SE/4 NE/4 Section 18-20S-10W,
Rice County, Kansas.

Drilled for: Beardmore Drilling Company, Inc.
Drilled by: Beardmore Drilling Company, Inc.

Casing Record:

8-5/8" 200'
5-1/2" 3320'

Drilling Commenced: August 13, 1941.
Drilling Completed: August 29, 1941.

<u>FORMATION</u>	<u>DEPTH</u>
surface	200
red bed	400
shale & shells	750
red bed & shale	900
red bed, shale & shells	1100
shale & shells	1300
broken lime	1400
shale & lime	1650
shale & shells	2020
shale	2480
shale & shells	2570
shale	2615
lime	2635
broken lime	2785
lime	2835
broken lime	2915
shale	3015
shale & lime	3085
lime	3121
lime -- cored	3140
broken lime	3195
shale	3225
shale & lime	3293
shale	3320
lime -- Arbuckle	3332 T.D.