


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

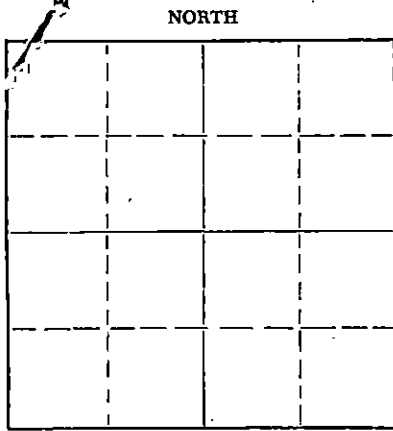

Locate well correctly on above
Section Plat

Rice County, Sec. 18 Twp. 20 Rge. (E) 10 (W)
Location as "NE/CNW/SW" or footage from lines SE/NW/NE
Lease Owner. Spector & Morganstern
Lease Name. Hirsh Well No. 2
Office Address. Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil well
Date well completed 1-27-38 19
Application for plugging filed August 5, 1955 19
Application for plugging approved August 8, 1955 19
Plugging commenced 8-16- 19 55
Plugging completed 8-23- 19 55
Reason for abandonment of well or producing formation failure to produce
profitably
If a producing well is abandoned, date of last production July 1954 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes yes
Name of Conservation Agent who supervised plugging of this well Ruell Durkee
Producing formation Arbuckle Depth to top 3308' Bottom 3328' Total Depth of Well 3328 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4" OD	194'	None
				6" OD	3308'	1620.53

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugging started 8-16-55 and completed 8-23-55. Measured in to TD 3328' and put in 30' sand. Dumped in 6 sacks of cement and shot at 1625'. Pulled pipe out of 10' hole. Plugged well with heavy mud; set a permanent/rock bridge at 194'. Dumped in 20 sacks of cement and filled hole with heavy mud, to 35' of top. Dumped in 5 sacks of cement for cap on well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Co. d/b/a J. O. Forbes
Address P. O. Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

Morgenstern & Spector (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Morgenstern*

(Address)

SUBSCRIBED AND SWORN to before me this 30th day of August, 1955


My commission expires Dec 1, 1955

RECEIVED
STATE CORPORATION COMMISSION

AUG 1 1955
CONSERVATION DIVISION
Wichita, Kansas

Notary Public.

8-31-55




15.159.64709.0000

GULF OIL CORP.
Maggie Hirsh No. 2.

SEC. 18 T. 20 R. 10W
SE NW NE

Total Depth. 3328'
Comm. 12-30-37 Comp. 1-27-38
Shot or Treated. 2000 & 3000 Gals.
Contractor.
Issued. 3-26-38

County. Rice



CASING:
10³/₄" 194'
6 " 3308'

Elevation.

Production. Pot. 768 B.
No wtr.

Figures Indicate Bottom of Formations.

cellar	9'4"
rocky soil	31
shale & shells	97
rock hrd	103
shale & shells	164
red bed & shells	452
anhydrite	480
red bed shale & shells	575
shale & shells	965
salt & shale	1190
shale & shells	1300
lime	1325
brkn lime & shale	1495
sand hrd	1507
shale & brkn lime	1650
sand	1675
shale & lime	1780
shale & lime shells	1915
lime	1945
brkn lime	1955
brkn lime & shale	2065
shale & strks lime	2165
brkn lime & shale	2370
brkn lime	2450
lime	2473
brkn lime	2487
lime	2503
brkn lime	2553
lime	2560
sand	2600
lime	2928
shale	3050
lime	3080
salt porous lime	3085
brkn lime	3124
soft porous lime	3137
lime	3254
lime hrd	3280
lime	3306
shale green	3308'6"
Siliceous lime	3312
lime	3328
Total Depth.	

Siliceous lime 3308-3328

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 X 1955
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 18 T. 20 R. 10W
BOOK PAGE 140 LINE 43