

15.159.04519.0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

RICE County, Sec. 21 Twp. 20Rge. (E) 10(W)

Location as "NE/CNW%SW%" or footage from lines C NE NE SW
Lease Owner Pabco Drilling, Inc et al
Lease Name SCHURR Well No. 4
Office Address 818 Central Building Wichita Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 11-23-52 19
Application for plugging filed 9-17-53 19
Application for plugging approved 9-17-53 19
Plugging commenced 9-18-53 19
Plugging completed 9-27-53 19
Reason for abandonment of well or producing formation production depleted

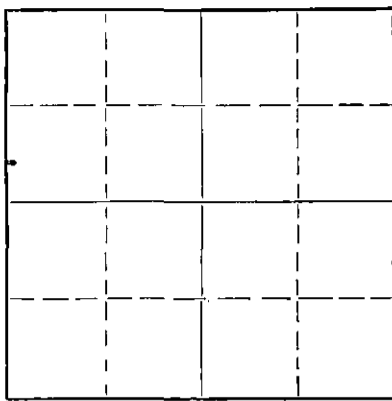

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production July 1953
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ronal Durkee
Producing formation Arbuckle Depth to top Bottom Total Depth of Well 3307 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
					3307	2816

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3307-3270 Sand Bridge
3270-3240 6 sx cement
3240-160 mudded
160-150 rock bridge
150-75 30 sx cement
15 to cellar 5 sx cement

11-10-53

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & S Pipe Pulling Co
Address Ellinwood Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
D. J. Briggs (employer, owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. J. Briggs
PABCO DRILLING, INC.
D. J. Briggs, President
(Address)

SUBSCRIBED AND SWORN TO before me this 9 day of November, 19 53

My commission expires 3-2-57

Ruth M. Sanders
Notary Public.

PLUGGING
FILE SEC 21 T 20 R 10W
BOOK PAGE 129 LINE 27

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15.159.04519.0000

Company- PABCO DRILLING CO., INC.
Farm- Schurr "A" No. 4

SEC. 21 T. 20 R.10W
NE NE SW

Total Depth. 3307
Comm. 11-12-52 Comp. 11-23-52
Shot or Treated.
Contractor. Pickrell Drilling Co.
Issued. 2-7-53

County Rice
KANSAS



Elevation. 1766

Production. 25 bbls.

CASING:

8 5/8 98' w/ 75 sx cement
5 1/2 3307' w/ 50 sx cement

Meas. from top rotary bushing. Figures indicate Bottom of Formations.

red bed & shale	410
anhydrite	455
shale	1200
shale & lime shells	1400
lime & shale	1630
lime & shale breaks	1750
lime & shale	2110
shale & shells	2380
shale	2546
lime & shale	2690
lime	2855
shale & shells	2985
lime	3307
Total Depth	

SCOUT-TOPS:

Howard	2475
Severy sand	2544
Topeka	2570
Heebner	2846
Brown lime	2974
Lansing	2997
Conglomerate	3267
Simpson sand	3269
Second Simpson sand	3299
Arbuckle	3304

RECEIVED
STATE CORPORATION COMMISSION
SEP 19 1953
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 21 T 20 R 10W
BOOK PAGE 122 LINE 27