


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

WELL PLUGGING RECORD

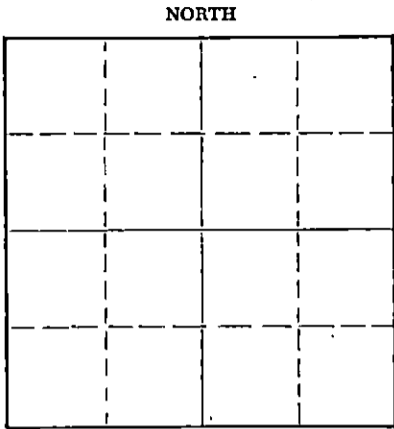

Locate well correctly on above Section Plat

Rice County. Sec. 17 Twp. 20 Rge. (E) 10 (W)
Location as "NE/CNW/SW" or footage from lines SW - SW - SW
Lease Owner Branine & Holl
Lease Name Thompson Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 11-8 19 56
Plugging completed _____ 11-13 19 56
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	250	8 5/8"		
		0	3117	7"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Lane-Wells plug @ 3096 - top perforation @ 3013 - sanded hole to 3000' - dumped 6 sks cement - mudded hole to 200' - set rock bridge - dumped 5 sks cement - let set overnight - bailed fluid to plug - dumped 10 sks cement - mudded to 15' - built rock bridge - dumped 5 sks cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Company License 236
Address Box 569 Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Robert Hoover (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Hoover

SUBSCRIBED AND SWORN to before me this 20th day of December, 1956

My commission expires August 5, 1957

6427 E. Kellogg St.
Mary E. Lacey
Mary E. Lacey, Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

DEC 21 1956

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 17.20 R.10W
BOOK PAGE 114 LINE 43