

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-127-20423-00-02  
Spot: W2NENENW Sec/Twnshp/Rge: 23-16S-5E  
4950 feet from S Section Line, 2990 feet from E Section Line  
Lease Name: RINDT Well #: 23-1  
County: MORRIS Total Vertical Depth: 2400 feet

Operator License No.: 34792  
Op Name: EAGLE ENERGY RESOURCES LLC  
Address: 153 S. BROADWAY ST.  
LAPORTE, TX 77571

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2327		125 SX
SURF	8.625	206		150 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/23/2018 12:00 AM  
Plug Co. License No.: 6819 Plug Co. Name: SCOTT'S WELL SERVICE INC  
Proposal Revd. from: JEFF SCOTT Company: \_\_\_\_\_ Phone: (785) 254-7828

Proposed Plugging Method: Sand well off 2206'. Put 5 sacks cement on top of sand with dump bailer. Go down 250' and perforate in order to pump cement to surface.

Plugging Proposal Received By: \_\_\_\_\_ WitnessType: PARTIAL  
Date/Time Plugging Completed: 03/23/2018 12:00 AM KCC Agent: JEFF KLOCK

Actual Plugging Report:

SANDED OFF BOTTOM TO 2206' TOPPED WITH 5 SX COMMON CEMENT. THEN BUILT A BRIDGE @ 260' TOPPED WITH 2 SACKS OF CEMENT. PERFORATED @ 250' WITH GEMINI WIRELINE. PUMPED 75 SX COMMON CEMENT 4% GEL 2% CALCIUM CHLORIDE AND CIRCULATED TO SURFACE. NO CEMENT ON BACKSIDE. SURFACE CASING WAS CEMENTED TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
250	255	CSG	

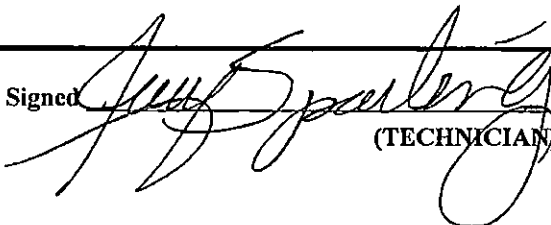
INVOICED  
AUG 23 2018

Remarks: COMPLIANCE 10 YEAR TA

Plugged through: CSG

District: 02

Signed

  
(TECHNICIAN)

JK