

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-127-20454-00-00
Spot: SWNENW Sec/Twnshp/Rge: 23-16S-5E
990 feet from N Section Line, 1650 feet from W Section Line
Lease Name: RINDT Well #: 23-2
County: MORRIS Total Vertical Depth: 2400 feet

Operator License No.: 34792
Op Name: EAGLE ENERGY RESOURCES LLC
Address: 153 S. BROADWAY ST.
LAPORTE, TX 77571

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2314		120 SX
SURF	8.625	165		125 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/23/2018 2:00 PM
Plug Co. License No.: 6819 Plug Co. Name: SCOTT'S WELL SERVICE INC
Proposal Revd. from: JEFF SCOTT Company: _____ Phone: (785) 254-7825

Proposed Plugging Method: PLUGGING IN ACCORDANCE WITH ICC REQUIREMENTS. USUALLY THIS CONSISTS OF A 50' SAND PLUG AT BOTTOM COVERED WITH A 5 SACK CEMENT PLUG. FILL FROM 250' TO SURFACE WITH CEMENT (ANNULUS AND CASING). CUT CASING OFF BELOW GROUND LEVEL. RESTORE GROUND AS NEEDED.

Plugging Proposal Received By: _____ Witness Type: PARTIAL
Date/Time Plugging Completed: 03/23/2018 2:00 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF BOTTOM AND TOPPED WITH 5 SX COMMON CEMENT. PERF TECH PERFORATED @ 250'. QES PUMPED 45 SX 60/40 POZMIX 4% GEL AND 2% CC AND CIRCULATED TO SURFACE. RAN 1 INCH DOWN BACKSIDE AND PUMPED 35 SX TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
2150	2400	CSG	

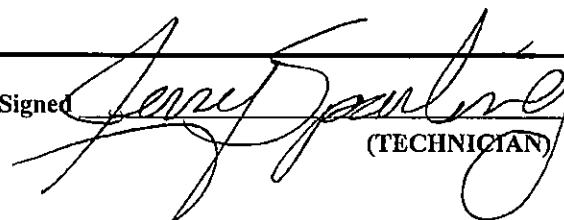
INVOICED
AUG 23 2018

Remarks: COMPLIANCE 10 YEAR TA RULE

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)