


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

15-153-20108-00-00

NORTH

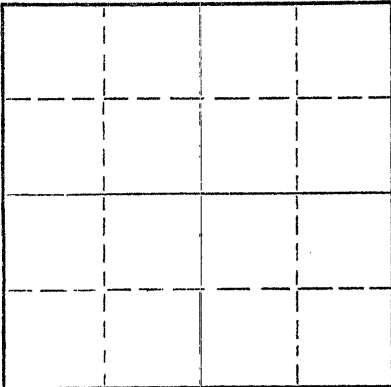

Locate well correctly on above
Section Plat

Rawlins County. Sec. 22 Twp. 1 Rge. (E)34 (W)
Location as "NE/CNW/SW" or footage from lines C NW NE
Lease Owner Isern-Wells
Lease Name Dozbaba Well No. 1
Office Address Box 486, Ellinwood, Kansas 67526
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 16 19 71
Application for plugging filed February 16 19 71
Application for plugging approved February 16 19 71
Plugging commenced February 16 19 71
Plugging completed February 16 19 71
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 4370 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	330'	8-5/8"	330'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill with heavy mud to 2160'. Set first plug, cemented with 100 sacks cement. Heavy mud to 340. Set second plug, cemented with 20 sacks cement. Heavy mud to 40'. Set third plug at 40' and cemented with 10 sacks. One sack cement in pathole.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Sedgwick, ss.
James S. Sutton, II (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *James S. Sutton*
830 Sutton Place, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 19 day of February, 1971

My commission expires February 1, 1972

Barbara J. Layton
Barbara J. Layton Notary Public.



GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

15-153-20108-00-00

DOZBABA #1
 C NW NE Section 22-1S-34W
 Rawlins County, Kansas

Commenced: February 8, 1971
 Completed: February 16, 1971

OPERATOR - Isern-Wells

DEPTH	FORMATION	REMARKS
FROM	TO	
0	335	Clay, shale and sand
		Ran 8 joints 8-5/8" casing, set @ 330' w/260 sacks cement.
335	865	Shale
865	1625	Shale and sand
1625	2060	Sand
2060	2257	Shale and sand
2257	2565	Shale and lime
2565	2717	Lime and shale
2717	2980	Shale
2980	2987	Lime and shale
2987	3025	Anhydrite
3025	3117	Lime and shale
3117	3533	Shale and lime
3533	4230	Lime and shale
4230	4370	Lime
4370	TD	Dry and abandoned.

RECEIVED
 STATE CORPORATION L
 02-24-1971
 FEB 24 1971
 CONSERVATION DIVISION
 Wichita, Kansas

I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NE Section 22-1S-34W, Rawlins County, Kansas to the best of my knowledge and belief.

James S. Sutton, II

 James S. Sutton, II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 19th day of February, 1971, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Barbara J. Layton

 Barbara J. Layton, Notary Public

My Commission Expires February 1, 1972.

