


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

15-147-00812-00-00
WELL PLUGGING RECORD

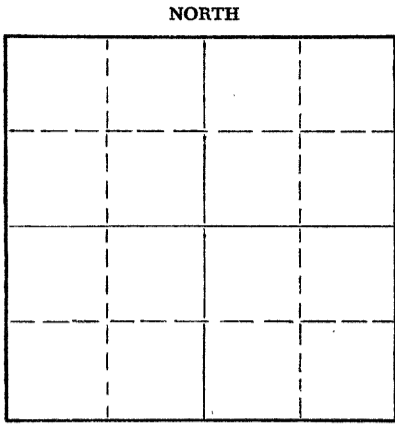

Locate well correctly on above
Section Plat

Phillips County. Sec. 18 Twp. 2 Rge. 18W(E) (W)
Location as "NE/CNW/SW" or footage from lines CE/2 NW NW
Lease Owner Bennett & Roberts Oil Operations
Lease Name Reece A Well No. 4
Office Address Russell, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed July 3 19 49
Application for plugging filed 12/14 19 54
Application for plugging approved 12/15 19 54
Plugging commenced 1/2 19 55
Plugging completed 1/8 19 55
Reason for abandonment of well or producing formation Not profitable to operate.

If a producing well is abandoned, date of last production Nov. 8 19 54
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3390 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	170'	None
				5 1/2"	3382'	1056'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with crushed rock to 3270', dumped 4 sax cement at 3270' with dump bailer. Top of cement 3250'. Filled with mud to 170', set rock bridge, dumped 15 sax cement, top of cement 125'. Filled with mud to 35', set rock bridge, dumped 10 sax cement for cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J & M Casing Pulling Co. 1-14-55
Address Great Bend, Ks.

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
Harold Wurst (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold Wurst
Russell, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of January, 19 55

My commission expires 6/17/58

Dora Hummel
Notary Public.
PLUGGING
FILE SEC 18 T 2 R 18W
BOOK PAGE 64 LINE 37

15-147-00812-00-00

Bennett & Roberts Oil Operations
Reece #4

Sec. 18 Twp. 2 Rge. 18
County: Phillips, Kansas

Total Depth: 3390
Comm: 5/14/49
Comp: 5/24/49

Top Lansing K.C. 3285

Casing
8 5/8" set @ 170'
5 1/2" set @ 3382

Cement
125 sx

Formation:	Depth:
Surface Clay	40
Sand & Shale	120
Shale & Shells	850
Sand	923
Shale & Shells	1109
Sand	1132
Shale & Shells	1510
Red Bed & Shale & Shells	1680
Shale & Shells	2210
Shale & Lime	3015
Lime	3390

STATE OF KANSAS)
RUSSELL COUNTY) SS.


I hereby certify that the above information is correct to the best of my knowledge.

Sylvia Day

Subscribed and sworn to before me this 14th day of December, 1954.

Clara Hummel
Notary Public

My Commission Expires 6/17/58

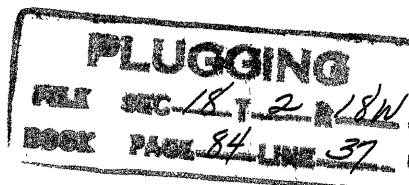

12-15-54