

RECEIVED

JUL 03 2003
07-03-2003
KCC WICHITA

STATE OF KANSAS
KANSAS CORPORATION COMMISSION
CONSERVATION DIVISION
130 South Market - Room 2078
Wichita, Kansas 67202

FORM CP-1 (3/92)

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-147-00794-0000 ⁰⁰⁻⁰² (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Bach Oil Production KCC LICENSE # 31569
(owner/company name) (operator's)

ADDRESS P.O. Box 723 CITY Alma

STATE Nebraska ZIP CODE 68920 CONTACT PHONE # (785) 476-5254

LEASE Imm B WELL# 8 SEC. 6 T. 2S R. 18 W (East/West)

SW. SE. SE. SPOT LOCATION/0000 COUNTY Phillips

330 FEET (in exact footage) FROM SYN (circle one) LINE OF SECTION (NOT Lease Line)

990 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL D&A SWD/ENHR WELL DOCKET# _____

CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH _____ SACKS

SURFACE CASING SIZE 8 5/8 SET AT 174 CEMENTED WITH 100 SACKS

PRODUCTION CASING SIZE 5 1/2 SET AT 3402 CEMENTED WITH 150 SACKS

1978 squeeze 1200'-1230' w/200 sx 1991 squeeze 2408'-2440' w/200 sx
LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 3394-3400' : 3388-91' : 3378-86' : 3305-16' : 3287-90'

ELEVATION 2159' KB T.D. 3404' PBD 3401' ANHYDRITE DEPTH 1710'-1730'
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR CASING LEAK JUNK IN HOLE Parted tubing @ 2480'

PROPOSED METHOD OF PLUGGING As per KCC instructions

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? No

If not explain why? No ACO required in 1951.

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Jason Bach PHONE# (785) 476-5254

ADDRESS 11528 Cornhusker Rd City/State Alma, NE 68920

PLUGGING CONTRACTOR Allied Cementing KCC LICENSE # _____
(company name) (contractor's)

ADDRESS P.O. Box 31; Russell, KS 67665 PHONE # (785) 483-2627

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) As soon as possible

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 6/25/03 AUTHORIZED OPERATOR/AGENT: Ray Head
(signature)

15-147-00794-00-202

B & A Drilling, Inc.
Inn "B" No. 8

SW SE SE Sec 6-28-18W
Phillips County, Kansas

Total Depth: 3404'
Com: 4-15-51
Com: 4-24-51

Water
Lick

PROPERTY OF
L. B. STABLEFORD

Casing

8 5/8" @ 174'
5 1/2" @ 3402'

Cement

125 sacks of Victor
150 Sacks of Ash Grove

RECEIVED
JUL 03 2003
KCC WICHITA

Formation	Depth:
Surface Hole	41
Shale-Shells-Sand	174
Shale-Shells	760
Shale-Shells-Sand	1155
SandShale	1429
Shale-Shells	1700
Anhydrite	1715 - 1730
Shale-Shells	1895
Lime-Shells-Shale	2240
Lime-Shale	2860
Lime-Shale-Sandy Shale	2985
Shale-Lime	3345
Lime	3404

From E-109
1710' - 1730'

STATE OF KANSAS)
)SS
RUSSELL COUNTY)


I hereby certify that the above information is true and correct to the best of my knowledge.

Violet Keller

Subscribed and sworn to before me this 8th day of May, 1951.

Clara Sumner
Notary Public

My commission expires: 6-17-54

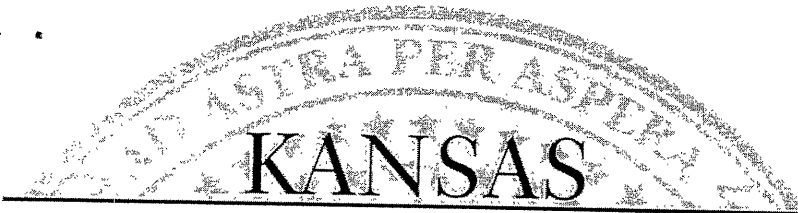

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Bach, Jason dba Bach Oil Production
RR 1, Box 28
Phillipsburg, KS 67661

July 08, 2003

Re: IMM B #8
API 15-147-00794-00-~~00~~ *02*
SWSESE 6-2S-18W, 330 FSL 990 FEL
PHILLIPS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550

Sincerely


David P. Williams
Production Supervisor