

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-017-20283-00-00  
Spot: S2S2NE Sec/Twnshp/Rge: 25-21S-9E  
2310 feet from N Section Line, 1320 feet from E Section Line  
Lease Name: ENO A Well #: 1  
County: CHASE Total Vertical Depth: 2407 feet

Operator License No.: 32044  
Op Name: TRIMBLE & MACLASKEY OIL LLC  
Address: 110 SOUTH ST PO BOX 171  
GRIDLEY, KS 66852

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2360		125 SX
SURF	8.625	150		75 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/09/2012 8:00 AM  
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC  
Proposal Rcvd. from: \_\_\_\_\_ Company: \_\_\_\_\_ Phone: \_\_\_\_\_

Proposed Plugging Method: Sand off perms. Cement plug 50 feet over perms. Perf at 200 feet & circulate cement to surface.

Plugging Proposal Received By: \_\_\_\_\_ Witness Type: NONE  
Date/Time Plugging Completed: 08/14/2012 8:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

RIGGED AND RAN 2 3/8 TUBING TO BOTTOM, FLUSHED HOLE, SPOTTED 30 SX OF COMMON WITH 2% CA, AND DISPLACED WITH 8 BBL OF FRESH WATER. TAGGED CEMENT AT 1666'. SPOTTED AN ADDITIONAL 20 X OF 60X40 POZ <4% GEL ON BOTTOM, PULLED TO 500' AND CIRCULATED 162 SX TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
2295	2299		

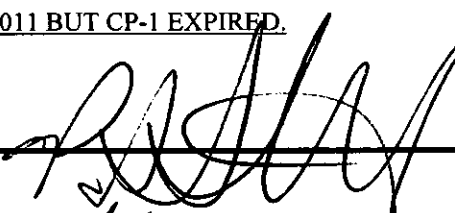
RECEIVED  
OCT 25 2012  
KCC WICHITA

Remarks: WELL WAS SCHEDULED TO BE PLUGGED IN 2011 BUT CP-1 EXPIRED.

Plugged through: TBG

District: 02

Signed

  
10/29/12 (TECHNICIAN)

1/2