

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-20977-00-00
Spot: N2SWSWSW Sec/Twnshp/Rge: 26-12S-19W
480 feet from S Section Line, 4950 feet from E Section Line
Lease Name: UBERT Well #: 1
County: ELLIS Total Vertical Depth: 3860 feet

Operator License No.: 5046
Op Name: RAYMOND OIL COMPANY, INC.
Address: PO BOX 48788
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3765		150 SX
SURF	8.58	192		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/15/2012 8:00 AM
Plug Co. License No.: 32810 Plug Co. Name: PROFESSIONAL PULLING SERVICES LLC
Proposal Rcvd. from: ART SCHOENHOFER Company: RAYMOND OIL CO Phone: (316) 267-4214

Proposed Plugging Method: Ordered 300 sx 60/40 pozmix 4% gel cement w/500 # hulls, 14 sx gel.
Perforations @ 3510' - 3514'.
DV @ 1511' w/275 sx cement

Plugging Proposal Received By: PAT STAAB Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 10/15/2012 12:15 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Perfs:

Ran in hole to 3300'. Rigged to tubing and pumped 14 sx gel followed by 50 sx cement w/75 # hulls.
Pulled tubing to 1800' and pumped 195 sx cement w/425 # hulls to circulate cement to surface.
Pulled tubing. Topped off 5 1/2" casing w/15 sx cement. Hole standing full.
Rigged to 8 5/8" casing with a swedge and pumped 15 sx cement to pressure. Cement blew out of hangers on top of head.

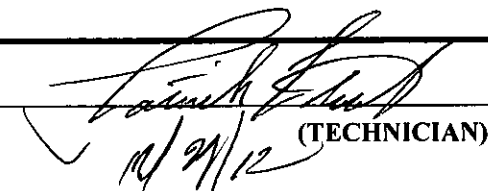
GPS: 38.97369 -099.40830

Remarks: CONSOLIDATED CEMENTING & O TICKET # 37256

Plugged through: TBG

District: 04

Signed


(TECHNICIAN)

CM

RECEIVED
OCT 29 2012
KCC WICHITA

OCT 15 2012