
Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

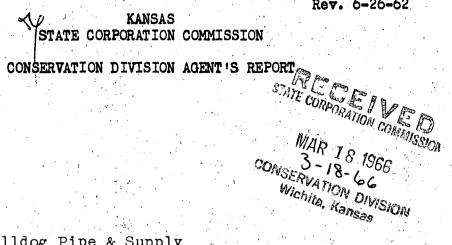

A	TO: 1 7 3 -	Dina C	122		
Operator's Full Na					
Complete Address:_	309 Mayo B	ldg., Tulsa	Oklahoma	-	, signatur
Lease Name_	Albright		Well No.	#	1
Location	SE SE	Se	s. <u>17</u> Twp	31 Rge. 8	(E) (W) W
County Hai	rper		_Total Depth_	44	90'
Abandoned Oil Well	Cas Well	Input Wel	1SWD Wel	L1D &	A <u>X</u>
Other well as here	after indicated:				
Plugging Contractor	ri Forbes C	asing Pulli	ng, Inc.		
Address: Box 22	21. Great Bend	, Kansas		License No	49
Operation Complete					1.00
The Above well was	plugged as folk	- I ewo	1		Y 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
175' of 8 5/8'	surface pipe	, cemented	with 150 sac	cks. 4489'	of 5½" lon
string, cemen	ted with 100 s	acks. This	is an open l	nole. Bott	om of the h
was sanded to	4400', and ce	mented with	5 sacks, th	nrough the	dump baile
3506' of 5½"]	long string wa	s recovered	from the ho	ole. Fluid	in the hol
was bailed do	wn to 175', ro	ck bridge f	rom 175' to	165', and	cemented w
25 sacks. Hole	e was filled w	ith mud to	40', rock bi	ridge from	40' to 30'
and cemented v	with 10 sacks	to the base	of the cel	lar.	
					·
I hereby certify to	hat the above well 01000	Ll was plugged	as herein sta	uted.	Clumang Supervisor