

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-063-22136-00-00  
Spot: NENWNWSE Sec/Twnshp/Rge: 35-11S-31W  
2520 feet from S Section Line, 2219 feet from E Section Line  
Lease Name: K&K/LEO UNIT Well #: 1-35  
County: GOVE Total Vertical Depth: 4610 feet

Operator License No.: 3581  
Op Name: RED OAK ENERGY, INC.  
Address: 7701 E KELLOGG DR STE 710 PO BOX  
WICHITA, KS 67207

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	341		210 sx

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/19/2013 12:00 AM  
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC  
Proposal Rcvd. from: MARK Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: Ordered 205 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE  
Date/Time Plugging Completed: 10/19/2013 10:30 AM KCC Agent: DAVID WANN

Actual Plugging Report:

1st plug @2460 w/25 sx  
2nd plug @1640 w/100 sx  
3rd plug @390 w/40 sx  
4th plug @40 w/10 sx

Rathole 30 sx


Perfs:

Remarks: GLOBAL

Plugged through: DP

District: 04

Signed

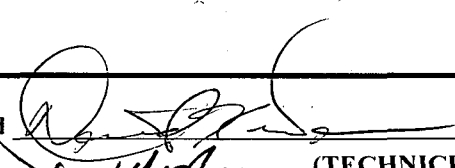

10/19/13

(TECHNICIAN)

CM

KCC WICHITA

Form CP-2/3

OCT 22 2013

OCT 24 2013

RECEIVED